

02/29/00
Jc760 U.S. PTO

03-01-00

A

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington D.C. 20231
Box Patent Applications

Case Docket No. FUJR 17.002
Filed by Express Mail
(Receipt No. EL522353927US)
on February 29, 2000
pursuant to 37 CFR 1.10
by Lydia Gonzalez

Jc584 U.S. PTO
09/515909
02/29/00

S I R:

Transmitted herewith for filing is: ☒ a new application
☐ a c-i-p application of S.N. _____ filed _____

Inventor(s): Takashi MONZAWA; Kenji MIURA; Tamotsu MATSUO; Hideki SHIONO;
Yoshimi TOYODA; Toshinori KOYANAGI; Setsuo ABIRU; Jun ASATO;
Shinichi FUJIYOSHI; Kazuhiro UCHIDA; Kazuya RYU; Katsuhiko HIRASHIMA;
Tateo SHIMARU

For: OPTICAL NETWORK UNIT AND OPTICAL LINE TERMINAL

Enclosed are:

- ☒ 25 sheets of drawings.(Figs. 1-25)
- ☒ Specification, including claims and abstract (64 pages)
- ☒ Declaration
- ☒ An assignment of the Invention to FUJITSU LIMITED
- ☒ A certified copy of Japanese Application No. 11-109687
- ☒ An associate power of attorney
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ Post card
- ☒ Recording fee (as indicated below)
- ☐ Information Disclosure Statement, PTO-1449, copies of _____ references
- ☐ Other _____
- ☐ Other _____

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	29-20 =	9
INDEP CLAIMS	3-3 =	0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2


SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
x 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$162
x 78 =	\$
x 260 =	\$
TOTAL	\$852

- ☐ Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee and recording fee (if any)
- ☒ A check in the amount of \$892.00 to cover the filing fee and the recording fee (if any) is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.
60th Floor
Empire State Building
New York, New York 10118-6098
(212)643-5000

Respectfully Submitted,

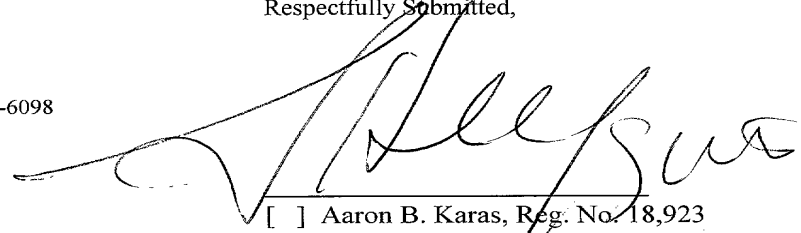

Date: February 29, 2000

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634

- ☐ Aaron B. Karas, Reg. No. 18,923
- ☒ Samson Helfgott, Reg. No. 23,072
- ☐ Leonard Cooper, Reg. No. 27, 625
- ☐ Linda S. Chan, Reg. No. 42,400
- ☐ Jacqueline M. Steady, Reg. No. 44,354
- ☐ Harris A. Wolin, Reg. No. 39,432

OPTICAL NETWORK UNIT AND OPTICAL LINE TERMINAL

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to an optical network unit and an optical line terminal. More particularly, the present invention relates to an optical network unit coupled to an optical access network system, which receives a data stream and dechurns information
10 contained in the received data stream by using a churning key. The invention also relates to an optical line terminal coupled to the optical access network system, which transmits a data stream containing information that is churned with a churning key.

2. Description of the Related Art

15 Increasing numbers of telecommunication and multimedia services are provided today to serve for the growing market needs, including video on demand, cable TV, and high-speed access to computer networks. Those high-
20 bandwidth services, however, should not raise the cost to subscribers. Here, optical access network systems are expected to play an essential role, connecting subscriber premises to the nearest local office exchange through fiber optic cables, rather than conventional metallic
25 wires.

One of such systems is called the Passive Double Star (PDS), which enables a plurality of subscribers to

share a single optical fiber line by using star couplers. Particularly in Europe, the Passive Optical Network (PON) system, synonymous with PDS, is of great interest as an enabling technology for the Fiber To The Home (FTTH) services. In the scenarios toward FTTH, the access network has to provide guaranteed bandwidths and quality of services to meet the requirements for real-time voice and video communication. To this end, the Full Service Access Networks (FSAN) initiative has a central role in the development of ATM-PON systems based on the Asynchronous Transfer Mode (ATM) technologies. The FSAN is an organization formed by major telephone companies to promote worldwide optical network businesses.

FIG. 25 shows a typical structure of an ATM-PON system. Optical network units (ONUs) 101a to 101n are deployed in subscriber premises 100a to 100n, while an optical line terminal (OLT) 201 is placed in a local office 200. Fiber optic cables and a star coupler 300 interconnect those ONUs 101a to 101n and OLT 201 in a point-to-multipoint fashion. In the subscriber premises 100a to 100n, telephone equipment and/or CATV equipment is coupled to the ONUs 101a to 101n. Connected to the OLT 201 in the local office 200 is ATM and ISDN switching equipment 202.

In the downstream direction, the local office 200 broadcasts data (i.e., downstream cells) toward the subscriber premises 100a to 100n over a single optical

fiber cable. The star coupler 300 splits the optical signal into a plurality of signals in a tree and branch form, so as to deliver the information to individual subscribers' ONUs. In the upstream direction, ATM cells
5 are transmitted from the subscriber premises 100a to 100n toward the local office 200 over the same branch cables. The star coupler 300 consolidates them into a single optical signal for delivery to the local office 200 over a single fiber cable.

10 As described above, the ATM-PON systems are ATM-based, optically-coupled access networks which provide point-to-multipoint (1:n) connections between a local office and a plurality of customers through the use of star couplers 300. The ITU-T Recommendation G.983.1 is one
15 of the relevant international standard specifications for such PON-based broadband optical access systems. This G.983.1 includes description of a data encryption function termed "churning" to offer a protection capability for data confidentiality purposes. This function is mandatory
20 because, in a PON system, the OLT always physically broadcasts information downstream, but only one ONU at a time can decode the information. More specifically, in the system of FIG. 25, the OLT 201 first sends a certain downstream message to request each ONU (e.g., ONU 101a) to
25 provide its churning key. In response to this request, the ONU 101a generates a churning key and sends it back to the OLT 201. With the received churning key, the OLT 201

encrypts, or churns, downstream cells before sending them out to the ONU 101a. This data churning operation for downstream cells are performed on an individual virtual path (VP) basis. The OLT 201 notifies the ONU 101a of which virtual path is churned or not, by sending a special downstream message indicating the virtual path identifier (VPI) of a particular path that is churned or not churned. This information is referred to herein as "churning parameters."

In summary, all ONUs in an ATM-PON system have their respective churning keys, and the churning of downstream information can be enabled or disabled separately for each VPI. The OLT sends downstream messages to notify each ONU of churning parameters before sending downstream cells. When data is received through a churned VP, the destination ONU decodes the data with its own churning key.

One problem with the above-described conventional system is that the ITU-T Recommendation G.983.1 lacks definitions for some specifics of the data dechurning functions to be used in ATM-PON systems. Take churning parameters stored in the ONU 101a for example. While those parameters are supplied from the OLT 201, the Recommendation G.983.1 does not stipulate when to activate the supplied parameters. This means that the data dechurning operation in the ONU 101a could be shifted in time, relative to the data churning operation in the OLT

201, and the time shift may grow up to such a critical level where the ONU 101a cannot decode the churned data correctly.

Another problem with the conventional ONUs is that they have to reload churning parameters from the OLT when they are rebooted after a power shutdown. This parameter reloading is a time-consuming process, while it is mandatory because the shutdown of ONUs clears out their stored churning parameters.

As seen from the above, conventional ATM-PON systems are still immature in terms of data churning techniques. It is therefore necessary to establish improved communication control algorithms in order to make ATM-PON systems truly practical.

SUMMARY OF THE INVENTION

Taking the above into consideration, an object of the present invention is to provide an optical network unit which efficiently controls the data receiving and dechurning processes.

To accomplish the above object, according to the present invention, there is provided an optical network unit coupled to an optical access network system, which receives a data stream and dechurns information contained in the received data stream by using a churning key. The two major elements of this optical network unit are: (a) a churning parameter memory subsystem, and (b) a data

dechurning unit. The churning parameter memory subsystem stores churning parameters that indicate which logical connections are churned or not churned. This subsystem comprises (a1) a first memory bank which is initially
5 assigned an active role to store the churning parameters that are currently used, and (a2) a second memory bank which is initially assigned a backup role to store newly updated churning parameters. Here, the first memory bank and second memory bank are controlled so that the active
10 and backup roles will alternate with each other at every churning key updating time point where an updated churning key becomes effective. The data dechurning unit receives a data stream consisting of a plurality of frames and dechurning the information contained in the data stream
15 according to the churning parameters stored in the first or second memory bank currently playing the active role. Here, the churning parameters are activated at the beginning of a frame subsequent to the churning key updating time point.

20 Further, it is another object of the present invention to provide an optical line terminal with improved communication control algorithms to efficiently manage data transmission processes.

To accomplish the above object, according to the
25 present invention, there is provided an optical line terminal coupled to an optical access network system, which transmits a data stream containing information that

is churned by using a churning key. This optical line terminal comprises the following elements: (a) a flag controller which controls flags when sending the data stream to a receiving end; and (b) a churning parameter transmission controller which controls the transmission of churning parameters to the receiving end, based on the status of the flags. Here, the churning parameters indicate which logical connections are churned or not churned.

The above and other objects, features and advantages of the present invention will become apparent from the following description when taken in conjunction with the accompanying drawings which illustrate preferred embodiments of the present invention by way of example.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a conceptual view of an optical network unit according to the present invention;

FIG. 2 is a diagram which shows a data stream structure and a format of churned-VP messages;

FIG. 3 is a message flow diagram which shows how to update a churning key;

FIG. 4 is a block diagram of an ONU employing a dual RAM bank structure;

FIG. 5 is flowchart which shows a parameter copying operation;

FIG. 6 is a timing diagram of the parameter

copying operation;

FIG. 7 is a timing diagram which shows the operation when a churned-VP message is received during a parameter copying operation;

5 FIG. 8 is a flowchart which shows a process of sending back an acknowledge message;

FIG. 9 is a flowchart which shows a process of copying updated churned-VP parameters from SRAM to non-volatile memory;

10 FIG. 10 is a flowchart which shows how the churning parameter memory subsystem operates when the power is restored;

FIG. 11 is a diagram which shows a process to disable data dechurning tasks;

15 FIG. 12 is a diagram which shows a variant of the proposed ONU;

FIG. 13 is a block diagram which shows a mechanism to realize a data dechurning operation in a subsequent frame;

20 FIG. 14 is a timing diagram which shows how data dechurning is performed in a subsequent frame;

FIG. 15 is a conceptual view of an optical line terminal according to the present invention;

25 FIG. 16 is a flowchart which shows an initial parameter delivery process using an initial parameter delivered flag;

FIG. 17 is a flowchart which shows an initial

parameter delivery process using an initial parameter sending flag;

FIG. 18 is a flowchart which shows an initial parameter delivery process using a parameter update failure flag;

FIG. 19 is a flowchart which shows an initial parameter delivery process using a parameter update unfinished flag;

FIGS. 20 and 21 show a flowchart of a process executed at the beginning of a parameter updating process;

FIG. 22 is a flowchart which shows a process of receiving an acknowledge message;

FIG. 23 is a flowchart which shows a process executed at the end of a parameter updating process;

FIG. 24 is a timing diagram which explains how the churned-VP parameters are updated; and

FIG. 25 is a diagram which shows the structure of a conventional ATM-PON system.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will be described below with reference to the accompanying drawings.

FIG. 1 is a conceptual view of an optical network unit (ONU) 10 according to the present invention. This optical network unit 10, coupled to an optical access network system (e.g., ATM-PON), receives a data stream

from an optical line terminal (OLT, not shown) in the nearest local office. Here, the term "data stream" refers to consecutive small data packets, or cells, carried over the network. The ONU 10 decodes the churned part of the
5 received data stream with a churning key which was produced by the ONU 10 itself.

The ONU 10 comprises a churning parameter memory subsystem 11 having two storage areas to store churning parameters; they are a first memory bank M11a and a second
10 memory bank M11b. The churning parameters are such setup information that shows whether each logical connection applies a churning process to send data. More specifically, they are essentially a collection of simple flags each corresponding to an individual virtual path identifier
15 (VPI) to indicate which virtual path (VP) is churned or not churned.

The two memory banks M11a and M11b in the churning parameter memory subsystem 11 change their roles alternately. In FIG. 1, the first memory M11a now plays an
20 active role, storing the current churning parameters which are read out for use in data dechurning processes. On the other hand, the second memory bank M11b is assigned a backup role to store newly updated churning parameters.

The churning parameter memory subsystem 11
25 controls data writing operations to the first memory M11a and second memory bank M11b. At each time point the churning key is updated (i.e., when the current key is

replaced with a new churning key), the churning parameter memory subsystem 11 alternates the roles of the two memory banks M11a and M11b. The details of this operation will be described later.

5 The ONU 10 further comprises a data dechurning unit 12, which receives a data stream consisting of a plurality of frames and dechurns it according to the churning parameters stored in the first memory M11a. When a new churning parameter is received in a certain frame, 10 the data dechurning unit 12 activates the received new parameter from a subsequent frame after a churning key updating time point is reached. The data dechurning unit 12 uses this activated new parameter to dechurn the relevant incoming cells in that frame and later, if the 15 parameter indicates that they are churned.

Suppose, for example, that a message in a certain frame contains a churning parameter indicating that a virtual path with a VPI value of "001" (in hexadecimal notation) is churned, and also that a cell C1 has a VPI 20 value of "001" in its overhead section. When the churning parameter is received, the ONU 10 first saves it to the second memory bank M11b, as shown in FIG. 1. This parameter, however, will be activated only after the following conditions are met: (1) a churning key update 25 message M1 is received, and after that, (2) a period of $(48 * T_{\text{frame}})$ is elapsed, where T_{frame} denotes the time length of one frame with which the ONU 10 should be

synchronized. In this way, the present invention provides the activation timing of newly received churning parameters, which prevents the received data stream from being dechurned in an unintended way. This issue will be
5 discussed in more detail later.

The ONU 10 further comprises an external storage controller 13 and a dechurning mask unit 14. Churning parameters in the churning parameter memory subsystem 11 are saved into a non-volatile memory 13a for data backup purposes, under the control the external storage controller 13. The dechurning mask unit 14 disables the function of the data dechurning unit 12 during a period from the ONU's restarting time point to the next churning key updating time point. Here, the term "restarting time point" means such a time point when the ONU 10 re-enters an operating state from another state, after having left its previous operating state. The details of the external storage controller 13 and dechurning mask unit 14 will be provided in a later part of this description.

20 With the foregoing concept of the invention in
mind, the structure and operation of the ONU 10 of FIG. 1
will now be provided in more detail below. In the
following sections, the term "churned-VP parameters" may
be used as a synonym of churning parameters, where
25 appropriate.

FIG. 2 shows the structure of a data stream and the format of churned-VP messages. Physical Layer

Operation and Management (PLOAM) frames are a class of transmission frames constituting a data stream sent from the OLT. Each PLOAM frame begins with a PLOAM cell carrying control information from OLT to ONUs, which is followed by twenty-seven user cells C1 to C27 containing transmission data. Tframe denotes the time of two PLOAM frame intervals in the case that the transmission rate is 150 Mbps. Both PLOAM and user cells are ATM cells each consisting of 53 bytes.

Churned-VP message is one of the control messages delivered to ONUs in the form of PLOAM cells. This message uses the fortieth through fifty-first bytes (bytes #40 to #51) of a PLOAM cell to convey a single churning parameter. Byte #40 holds an identifier called "PON-ID," which indicates the destination ONU of this message. Byte #41 gives a message identification code "00001111" (left-most bit is MSB; right-most bit is LSB) showing that this message is a churned-VP message. Bytes #43 and #44 carry a 12-bit virtual path identifier VPI(11:0) indicating which virtual path this message relates to. Here, the notation (M:N) represents the N-th to M-th bits of a binary value, whose length is thus (M-N+1) bits where M>N. Since this 12-bit VIP value does not fit in a single byte, VPI(11:0) is divided into two parts: the upper 8 bits VPI(11:4) ("abcdefgh" in byte #43) and the lower four bits VPI(3:0) ("ijkl" in byte #44). Such a 12-bit VPI field allows the ATM-PON system to support up to 4096 virtual paths.

Although not explicitly shown in FIG. 2, every user cell contains like VPI information to indicate on which virtual path it has been transported.

Byte #42 shows whether the virtual path specified in bytes #43 and #44 is churned or not churned. The table in FIG. 2 expresses this byte #42 as "xxxxxxxa," where "x" denotes "undefined," and "a" is called the "act bit." If a=1, this means that transmission data on the virtual path has been churned by the OLT, and thus the receiving ONU should dechurn it. If a=0, the data is not churned. The Recommendation G.983.1 gives no specific meanings to the remaining bytes #45 to #51 yet.

Referring next to FIG. 3, the following section will describe how to update a churning key.

In the ATM-PON system including the proposed ONU 10, the churning key is updated as requested by a maintenance station which is located at the OLT's site. FIG. 3 is a message flow diagram which shows how the churning key is updated.

(S1) The OLT transmits a churning key update message M1 to the ONU 10 to request a new churning key value.

(S2) The ONU 10 produces a new churning key and sends it back to the OLT in the form of an acknowledge message m1.

(S3) When a period of $(16 * T_{\text{frame}})$ has elapsed after the first churning key update message M1, the OLT transmits a second churning key update message M2 to

the ONU 10.

(S4) As in step S2, the ONU 10 sends again the updated churning key to the OLT in a second acknowledge message m2.

5 (S5) When a period of $(16 * T_{\text{frame}})$ has elapsed after the second churning key update message M2, the OLT transmits a third churning key update message M3 to the ONU 10.

10 (S6) As in steps S2 and S4, the ONU 10 sends back the updated churning key to the OLT in a third acknowledge message m3.

(S7) Finally, the new churning key becomes active when the interval of $(48 * T_{\text{frame}})$ has elapsed after the OLT transmitted the first churning key update message M1. This time point is referred to herein as the "churning key updating time point." The OLT then starts to churn the outgoing data to the ONU 10 with this new churning key, while the ONU 10 uses the same key to dechurn the incoming data. The OLT and ONU 10 conduct the above synchronously, counting each $(16 * T_{\text{frame}})$ interval at both ends.

Note here that the above sequence implies that the OLT and ONU 10 perform data churning and dechurning with the old churning key until the total period of $(48 * T_{\text{frame}})$ is elapsed after the first churning key update message M1 is sent from the OLT to the ONU 10.

Referring now to FIG. 4, the next section will

describe the dual RAM bank structure of the proposed churning parameter memory subsystem 11, as well as illustrate its data copying operation. As explained in FIG. 3, the churning key is refreshed at the churning key updating time point. This naturally means that the ONU 10 has to update its churned-VP parameters accordingly at the same time point, and therefore, the ONU 10 should make all the newly received parameters ready in its local RAM, before the next churning key updating time point is reached.

FIG. 4 is a block diagram of the ONU 10 employing a dual RAM bank structure. This ONU 10 shown in FIG. 4 differs from the one explained in FIG. 13 in that it further comprises another RAM M11b, a switching controller 11-3, and a replication controller 11-4. The switching controller 11-3 and replication controller 11-4 are integral part of the churning parameter memory subsystem 11 shown in FIG. 1.

Initially, the RAM M11a is chosen as the current active storage which provides the ONU 10 with churned-VP parameters, being addressed by VPI(11:4). The other RAM M11b works as the backup storage which is used to hold new churned-VP parameters until the next churning key updating time point. The switching controller 11-3 captures the churning key updating time point by receiving three churning key update messages M1 to M3 and ensuring that a period of $(48 * T_{\text{frame}})$ has elapsed after the reception of

the first churning key update message M1. When the churning key updating time point is reached, the switching controller 11-3 switches between the RAM M11a and RAM M11b, thereby making the RAM M11b active and the other RAM M11a backup. This switching operation, however, causes the backup RAM data to retrograde because the RAM M11a has not been updated since the previous churning key updating time point. To solve the problem, the replication controller 11-4 copies data from the newly activated RAM M11b to the RAM M11a that is now playing the backup role.

The RAMs M11a and M11b are each equipped with two ports which allow simultaneous data read operations. For example, the active RAM can provide churned-VP parameters to the data dechurning unit 12, while sending data to the backup RAM for copying purposes. FIG. 5 is a flowchart showing this parameter copying operation. It is assumed here that the RAM M11a is initially assigned the active role, and the other RAM M11b the backup role. Their data contents are shown in FIG. 5, where the values on the left-hand side are VPIs and those on the right-hand side are their respective act bit values. For instance, the expression "000"=1 denotes that the RAM contains a churned-VP parameter that indicates the virtual path with a VPI value of "000" is churned (i.e., act bit a=1). The copying operation proceeds as follows.

(S10) At each churning key updating time point, the switching controller 11-3 switches between the two

RAM banks, i.e., RAM M11a and RAM M11b.

(S11) The switching controller 11-3 informs the replication controller 11-4 of the churning key updating time point. In response to this, the replication controller 11-4 reads out one data entry from the active RAM M11b, incrementing the read address counter.

(S12) The replication controller 11-4 writes the read data entry to the backup RAM M11a, incrementing the write address counter.

(S13) The replication controller 11-4 tests whether the write address counter has reached its maximum address value. If it has not yet reached the maximum, the process returns to step S11 to repeat steps S11 and S12 for other data entries. If it is the maximum, the process exits from the copying routine.

FIG. 6 is a timing diagram which shows the sequence of the parameter copying operation in more detail. KEYTIM is a timing pulse signal that indicates churning key updating time points. RAM-STATE shows which of the two RAM banks is working as the active RAM currently. In the context of FIG. 6, the RAM(A) is activated at the shown churning key updating time point, while the RAM(B) was working as the active RAM before that time point. Note that RAM(A) and RAM(B) in FIG. 6 refer to the RAMs M11a and M11b in FIG. 4, respectively. COPYMODE, when it is high, indicates that the churning parameter memory

subsystem 11 is copying its data contents from active RAM to backup RAM. COPYCTR is the output of a counter which increments the RAM address from zero to 256 while the COPYMODE signal is at a high level. This counter is
5 actually a modulo 259 counter since the RAM write enable signal XWE (described more in a later part) has a phase lag as shown in FIG. 6.

RAMA-RAD is the read address of RAM(A), which has just been designated as the active RAM. This RAMA-RAD is
10 produced by shifting COPYCTR by one unit interval of copying cycle, which is referred to hereafter as the "cycle time." RAMA-RDT shows a series of data words which are read out of the RAM(A) according to the sequential address signal RAMA-RAD. As seen from FIG. 6, the read
15 data entries include: "A" for address "0," "B" for address "1," and so on. Note that RAMA-RDT follows RAMA-RAD with a delay of one cycle time.

RAMB-WDT, on the other hand, shows a series of data words to be written into RAM(B), which has just been
20 switched to the backup RAM. This RAMB-WDT is produced by shifting RAMA-RDT by one cycle time. RAMB-WAD is the write address given to RAM(B) when writing RAMB-WDT to it. That is, the data "A" read out of RAM(A) is written to address "0" of RAM(B), data "B" to address "1," and so on. XWE is
25 an active-low write enable signal which initiates a write operation to RAM(B), which has just been designated as the backup RAM, so as to copy the contents of RAM(A) to RAM(B).

In the way described above, the ONU of the present invention copies the latest churned-VP parameters from the active RAM to the backup RAM, each time the two RAM banks change their roles. This configuration permits the backup RAM to keep track of the latest churned-VP information, so that the memory content will be always consistent with what the OLT intends.

The next section will now describe how the proposed ONU will operate when it has received a new
10 churned-VP parameter while a copying activity is in progress.

Since the ONU counts the number of frames by interpreting every PLOAM cycle as one frame unit, the churning key updating time point always occurs right at the time point of PLOAM cell reception. The PLOAM cell received at this churning key updating time point may contain churned-VP information. The ONU, however, cannot write the information to its backup RAM immediately, because parameter copying operations have already started and the backup RAM is receiving data from the active RAM. To properly update the backup RAM with the newly given information, the proposed ONU uses a flag indicating that a parameter copying operation is in progress. If a churned-VP message is received while this flag is set, the ONU waits until the flag is cleared at the end of the parameter copying operation, and then writes the received churned-VP parameter to the backup RAM. Actually, the

aforementioned COPYMODE signal serves as a flag for this purpose.

FIG. 7 is a timing diagram which shows how the proposed ONU will operate when it receive a churned-VP message during a parameter copying operation. COPYMODE is set to "H" (high level) during a parameter copying operation. CHURNED-TR is a trigger signal that becomes "H" when a churned-VP message is received. CHURNED-LT is then produced by latching the CHURNED-TR signal when it becomes "H" while COPYMODE is "H." This CHURNED-LT is reset to "L" (low level) when the parameter copying operation is finished. At the falling edge of CHURNED-LT, CVP-CTR is loaded to provide a backup RAM write address.

As described above, the proposed ONU is configured to temporarily hold new churned-VP information received during a parameter copying operation, and not to write it to the backup RAM until that operation is finished. That is, the proposed ONU performs a parameter copying operation first and then overwrites the copied data with newly received churned-VP parameters. This prioritization ensures that the backup RAM will be properly updated with new information.

The next section will explain how the proposed ONU returns an acknowledge message in response to a churned-VP message.

The ITU-T Recommendation G.983.1 requires ONUs to send back an acknowledge message to notify the OLT of the

correct reception of a churned-VP message. G.983.1, however, does not provide specific conditions for returning acknowledgment. According to the present invention, the ONU 10 returns an acknowledge message to the OLT, only when the churning parameter memory subsystem 11 can successfully verify the churned-VP parameters that have been written into the RAM. This verification is done by re-reading the data and comparing it with the original data that has been written.

FIG. 8 is a flowchart which shows a process of sending back an acknowledge message. It is assumed here that RAM(A) is serving as the active RAM, and RAM(B) as the backup RAM, and that the data has already been copied from RAM(A) to RAM(B). When a churned-VP message is received in this context, the ONU writes the information to RAM(B) and then sending back an acknowledge message after reading out the information again from RAM(B) for verification. This process comprises the following steps.

(S20) The ONU receives a churned-VP message.

(S21) The ONU reads data out of an address of RAM(B) that is specified by the received churned-VP message. That is, VPI(11:4) is supplied to RAM(B) as its read address, thereby reading out a relevant data word. By extracting one bit specified by VPI(3:0), the act bit information is obtained from the data word.

(S22) The ONU performs a parity check for the data word read out of RAM(B). Here, an error check and

correction mechanism is employed to ensure more reliable data transport between LSI devices, for example. This is accomplished by adding an error correction code to each data to be transmitted. If no errors are detected, the process advances to step S23. If an unrecoverable parity error is detected, the process branches to step S29.

(S23) The ONU compares the read data of RAM(B) with the act bit information found in the received churned-VP message. If they do not agree, the process advances to step S24. If they have the same value, the process skips to step S25.

(S24) The ONU writes the updated act bit information to the same address as it made access at step S21.

(S25) The ONU re-reads the data from the same address.

(S26) The ONU performs a parity check for the data word read out of RAM(B). If no errors are found, the process goes to step S27. If an unrecoverable parity error is detected, the process branches to step S29.

(S27) The ONU compares again the data read out of RAM(B) with the act bit information found in the received churned-VP message. If they agree with each other, the process advances to step S28. If they do not agree, the process proceeds to step S29.

(S28) Now that the information has successfully been written into RAM(B), the ONU sends back an acknowledge message to notify the OLT of the correct

reception of the churned-VP message.

(S29) The detected error is reported to a controller that controls the entire system of the ONU 10.

In this way, the churning parameter memory subsystem 11 of the present invention performs a write verification of each churned-VP parameter when it is received from the OLT and written into RAM. The ONU 10 returns an acknowledge message to the OLT, only when the written data is successfully verified. This feature of the invention prevents the stored churned-VP parameters from becoming inconsistent with that in the OLT.

Referring back to FIG. 1, the external storage controller 13 will be described below. The proposed ONU 10 is equipped with a backup power supply which will work in case of a main power failure, and with this backup power supply, the external storage controller 13 saves the current churned-VP parameters into a non-volatile memory 13a such as flash memory devices. This feature permits the ONU to recover by itself without requesting the OLT to resend churned-VP parameters after rebooting, since the necessary information is safely stored in the non-volatile memory 13a.

Once the current churned-VP parameters are saved, the external storage controller 13 selectively updates the entries of the non-volatile memory 13a with newly arrived churned-VP parameters, if it is different from the currently stored information. More specifically, when some

act bit information is written at step S24 in the flowchart of FIG. 8, the churning parameter memory subsystem 11 sets its corresponding update flag indicating that the act bit information has been updated. Referring
5 to this update flag as an enabling condition, the external storage controller 13 reads out data from its relevant address of the backup RAM and saves it the non-volatile memory 13a. In this way, the non-volatile memory 13a is updated efficiently by writing only the changed entries.

10 Generally, most memory devices for use as the non-volatile memory 13a are limited in terms of the number of programming cycles, which necessitates further efforts to reduce the frequency of data write operations that the external storage controller 13 may execute. To this end,
15 the external storage controller 13 may be configured to store the churned-VP parameters to, for example, an SRAM (Static RAM) device when the system is rebooted, and transfer the data back to the non-volatile memory 13a when the ONU 10 is shut down. This configuration will
20 effectively reduce the access to the non-volatile memory 13a. After the initial transfer of churned-VP parameters from the non-volatile memory 13a to the SRAM (not shown), the external storage controller 13 only has to selectively update the SRAM contents with such churned-VP parameters
25 whose corresponding update flag is set. When the ONU 10 is shut down, the external storage controller 13 may transport only the changed churned-VP parameters to the

non-volatile memory 13a, rather than transferring all the SRAM contents.

FIG. 9 is a flowchart which shows a process of copying updated churned-VP parameters from the SRAM to the non-volatile memory 13e. This process comprises the following steps.

(S30) The churning parameter memory subsystem 11 sets update flags corresponding to specific churned-VP parameters when they are changed.

10 (S31) According to the update flags being set, the external storage controller 13 reads out their relevant churned-VP parameters from the backup RAM.

(S32) The external storage controller 13 writes the changed churned-VP parameters into the SRAM.

15 (S33) When the ONU 10 is shut down, the external storage controller 13 transfers the SRAM contents to the non-volatile memory 13a.

As an alternative action at step S33, the external storage controller 13 may transport only the changed churned-VP parameters to the non-volatile memory 13a, rather than transferring all the SRAM contents, when the ONU 10 is shut down. This configuration will reduce the access to the non-volatile memory 13e more effectively.

When the main power is restored, the ONU 10 will operate as follows. The ITU-T Recommendation G.983.1 defines ten states of the ONUs, which are referred to as O1 to O10, and more particularly, it requires that the

ONUs be in state 01 or 09 after the main power is restored. Here, state 01 is the initial state of an ONU after power-up, while state 09 denotes the emergency stop state. Once the ONU enters the Emergency stop state, it cannot
5 communicate with the OLT, being disconnected from the network.

According to the present invention, the proposed ONU 10 has another state with a symbol "00," which represents the state just after power-up. This newly
10 defined state 00 means an initial preparation state in which the ONU determines whether to go to 01 or 09. The churning parameter memory subsystem 11 of the present invention is designed to accept churned-VP parameters from the non-volatile memory 13a, only when the ONU is in this
15 state 00 after power-up. Even if some external event changed the RAM while the ONU 10 was in the operating state (i.e., state 08), the above mechanism would not activate that information. Thus the churned-VP parameters in the ONU 10 will be kept consistent with those in the
20 OLT.

The churning parameter memory subsystem 11, on the other hand, can determine its initial data source in state 00, choosing either of the churned-VP parameters read out of the non-volatile memory 13a or those that newly
25 received from the OLT. In other words, the ONU is offered a choice of whether to enable or disable the churned-VP parameters that was reloaded from the non-volatile memory

006220-00651560

13a during the 00 state. This is because it is sometimes preferable for the ONU 10 to use churned-VP parameters resent from the OLT. To support those two options in state 00, the proposed ONU configures the churning parameter memory subsystem 11 in such a way that one of its two RAM banks keeps the values loaded from the non-volatile memory 13a, while the other RAM bank is initialized so that all the entries will be set to the "Not churned" state. The ONU 10 provides a flag to indicate which RAM bank should be activated. This flag, referred to herein as the "enable external memory flag," will be set when the ONU 10 intends to use the values loaded from the non-volatile memory 13a. In this case, the values loaded to the RAM are subjected to later updates, being overwritten with incoming churned-VP parameters. When the enable external memory flag is cleared, new churned-VP parameters sent from the OLT will be written into the RAM that has been initialized to the "Not churned" state. In both cases, the aforementioned parameter copying operation begins at a churning key updating time point.

FIG. 10 is a flowchart which shows how the churning parameter memory subsystem 11 operates when the main power is restored. It is assumed now that all the RAM(A) entries have been initialized to the "Not churned" state, and also that RAM(B) has been loaded with the churned-VP parameters copied from the non-volatile memory 13a. It is further assumed that user cells are not churned

during a period "B." In such a situation, the churning parameter memory subsystem 11 operates according to the following steps.

(S40) It is tested whether the enable external memory
5 flag is set. If the flag is set, the process advances
to step S41. If not, the process branches to step S45.

(S41) The churning parameter memory subsystem 11 designates RAM(A) as the active RAM, and RAM(B) as the backup RAM.

```

10      (S42)  Each time a churned-VP message is received, a
              relevant entry in RAM(B) is overwritten with the
              received parameter.

```

(S43) At a churning key updating time point, the churning parameter memory subsystem 11 designates RAM(A) as the backup RAM, and RAM(B) as the active RAM.

(S44) The contents of RAM(B) is copied to RAM(A).

(S45) If a churned-VP message is received, the process advances to step S46. If not, the process returns to step S40.

(S46) The churning parameter memory subsystem 11 designates RAM(A) as the backup RAM, and RAM(B) as the active RAM.

(S47) Each time a churned-VP message arrives, the
25 relevant entry in RAM(A) is overwritten with the
received parameter.

(S48) At a churning key updating time point, the

churning parameter memory subsystem 11 designates RAM(A) as the active RAM, and RAM(B) as the backup RAM.

(S49) The contents of RAM(A) is copied to RAM(B).

5 Referring now to FIG. 11, the dechurning mask unit 14 operates as follows. The ONU 10 is designed to begin dechurning of incoming user cells when it enters the operating state O8. However, in the case that the ONU 10 comes back to O8 after a transition from O8 to any other
10 state, if the churning key of the ONU 10 happened to be different from what the OLT thinks it should be, the ONU 10 could erroneously apply a dechurning operation to user cells. It is therefore necessary for the ONU 10 to mask, or disable, the dechurning function during the above
15 transition period, and FIG. 11 shows how to perform this. The process proceeds according to the following steps.

(S50) The ONU 10 changes from the operating state O8 to another state.

(S51) In response to the state transition, the
20 dechurning mask unit 14 sets a masking flag.

(S52) The dechurning mask unit 14 then disables the dechurning function of the ONU 10.

(S53) The ONU 10 returns to the operating state O8.

(S54) The dechurning mask unit 14 waits for the first
25 churning key updating time point after the ONU 10 has entering to O8. When that time point is reached, it clears the masking flag to enable again the

dechurning function.

(S55) The ONU 10 begins dechurning incoming user cells on the basis of the new churning key and new churned-VP parameters.

5 In the way described above, the dechurning mask unit 14 is designed to disable the data dechurning function during the period between a transition to O8 and its subsequent churning key updating time point, outputting given user cells just as they are. This prevents the ONU from erroneously dechurning user cells, since the data dechurning function will not become effective until the OLT and ONU 10 can ensure their use of the same churning key.

15 While the above sections have described a preferred embodiment of the present invention, it is not intended to limit the invention to that specific structure. FIG. 12 shows an optical network unit 10a, an alternative implementation of the ONU 10. While this ONU 10a of FIG. 12 has an external storage controller 13, its specifics will not be explained here again since they can be found in an earlier section.

20 According to this alternative implementation, a churning parameter memory subsystem 11a has only a single storage area for storing churned-VP parameters. A data dechurning unit 12a receives a data stream consisting of a plurality of frames and dechurns it according to the churned-VP parameters stored in the churning parameter

25

memory subsystem 11a. When a new churned-VP message is received in a certain frame, the data dechurning unit 12a will activate the received parameter at the beginning of the next frame. Then the data dechurning unit 12a uses the
5 churned-VP parameter to dechurn the incoming data streams in that frame and later.

It is assumed, for example, that there is a churned-VP message which contains a churning parameter indicating that a virtual path with VPI="001" (in
10 hexadecimal notation) is churned, among other virtual paths within each frame of the data stream. It is also assumed that the user cell C1 in each frame has a VPI with a value of "001" in its overhead section. When the above churning parameter arrives at the ONU 10a in PLOAM frame
15 #1, the data dechurning unit 12a activates the churned-VP parameter in the subsequent PLOAM frame #2 after reading out the churned-VP parameter from the churning parameter memory subsystem 11a. That is, the dechurning of the user cell C1 begins in PLOAM frame #2.

20 As seen from the above, the ONU 10a differs from the ONU 10 in that it needs only one storage space, and in that it activates a new churned-VP parameter independently of the update timing of churning keys. This single memory structure permits the ONU 10a to decode user cells in a
25 more efficient manner.

FIG. 13 is a block diagram which shows a mechanism to realize a data dechurning operation in a subsequent

frame. This mechanism comprises a RAM M11, a churned-VP message flag setting unit 11-1, and a churned-VP parameter writing unit 11-2, which are components of the churning parameter memory subsystem 11a in FIG. 12. The data
5 dechurning unit 12a in FIG. 12 is shown as a data dechurning unit 12 in FIG. 13.

When a churned-VP message is found in a received PLOAM cell, the churned-VP message flag setting unit 11-1 sets a relevant churned-VP message flag. The churned-VP
10 parameter writing unit 11-2 writes the received churned-VP parameter to the RAM M11, controlling its write enable input according to the churned-VP message flag. The RAM M11 is organized as a 16-bit \times 256-word memory. When a churned-VP message containing a specific VPI and its act
15 bit status is received, the RAM M11 is addressed by VPI(11:4) out of the received 12-bit VPI(11:0), and the act bit status is written into one of the sixteen data bits as specified by VPI(3:0). In this way, the RAM M11 provides storage space for 4096 instances of the act bit
20 information.

The data dechurning unit 12 receives an incoming data stream, extracting a VPI(11:0) value from each user cell in the stream. The data dechurning unit 12 supplies the RAM M11 with VPI(11:4) out of the extracted VPI(11:0)
25 as its read address, thereby reading out a data word containing sixteen act bits. By choosing one bit as specified by VPI(3:0), the act bit information relevant to

the user cell is obtained. If a=1 (i.e., the act bit is "1"), the data dechurning unit 12 dechurns the cell by using an appropriate churning key. If a=0, the data dechurning unit 12 outputs the cell as it is, without
5 dechurning its data part.

FIG. 14 is a timing diagram which shows how the incoming information is dechurned, assuming that a PLOAM cell #1 in the data stream contains a churned-VP message that says the virtual path with a VPI(11:0) value of "001"
10 (in hexadecimal notation) is churned (i.e., its act bit is "1"). When this PLOAM cell #1 is received, the churned-VP message flag setting unit 11-1 recognizes it as a churned-VP message by detecting its message identification in byte #41. Upon recognition, it outputs a relevant churned-VP
15 message flag as shown in FIG. 14. On the other hand, the churned-VP parameter writing unit 11-2 internally holds the received VPI(11:0)="001" and act bit information (a=1) until it detects the first user cell C1 in the next frame. Referring to FIG. 14, PLOAM pulses indicate the position
20 of each PLOAM cell, while cell framing pulses define the beginning of individual cells. The write enable signal for the RAM M11 is created through a logical AND operation of the churned-VP message flag and PLOAM pulses. Using this write enable signal, together with the cell framing pulses
25 as the write timing signal, the churned-VP parameter writing unit 11-2 performs a RAM write operation. During this operation, VPI(11:4)="00" is supplied to the RAM M11

as its write address, and VPI(3:0)="1" specifies the bit position of the write data, so that the act bit information will be written to the specified bit in the RAM M11.

5 As a result of the above, the churned-VP parameter given by the PLOAM cell #1 is written into the RAM M11 at the beginning of the PLOAM cell #2 in the next frame. After that (from the time point "A" in FIG. 14, at which the first user cell C1 begins in the next frame), the data
10 dechurning unit 12 reads out this information from the RAM M11 each time a cell with a VPI(11:0) value of "001" is received, and dechurns the cell accordingly. In the present example, the data dechurning unit 12 dechurns the cell C1 just after the time point "A," since the cell C1
15 has a VPI(11:0) value of "001."

 Suppose, on the other hand, that the next PLOAM cell #2 in the data stream contains a churned-VP message that says the virtual path with a VPI(11:0) value of "010" is not churned (i.e., a=0). In this case, every incoming
20 cell having this VPI value "010" will be handled as it is, without being dechurned, according to the timing diagram of FIG. 14.

 As described above, the proposed ONU 10a is designed to receive a new churned-VP parameter from the
25 OLT in a PLOAM cell and activates it when the next PLOAM cell is received in the subsequent PLOAM frame. That is, the ONU 10a can start to dechurn the incoming user cells

immediately from the next frame. This configuration reduces the latency of data received from the OLT, besides preventing inconsistencies from being introduced between the data churning process at the OLT and the data
5 dechurning process at the ONU 10a.

Referring next to FIGS. 15 to 24, an optical line terminal (OLT) according to the present invention will now be described below.

FIG. 15 is a conceptual view of an optical line
10 terminal 20 according to the present invention. Being coupled to an optical access network system (e.g., ATM-PON), this OLT 20 transmits a data stream to a plurality of optical network units 30a to 30n (or ONUs 30, collectively). Here, the data stream contains information
15 encrypted by using a churning key.

The OLT 20 comprises a flag controller 21, a churning parameter transmission controller 22, a churning parameter overwriting unit 23, and a churning parameter updating unit 24. When sending a data stream, the flag
20 controller 21 sets and clears various flag, according to the status of the ONUs 30. Based on the flags, the churning parameter transmission controller 22 controls transmission of churning parameters (i.e., churned-VP parameters) which indicate which logical connections are
25 churned or not. The churning parameter overwriting unit 23 resends churned-VP parameters to ONUs 30, allowing them to overwrite their own information bases. The churning

parameter updating unit 24 controls the update time points of churned-VP parameters so that they will be synchronized with the end of each churning key updating operation.

The flags mentioned above include an "initial parameter delivered flag," which is controlled by the flag controller 21 as follows. The OLT 20 sends churned-VP parameters to the ONU 30a when the ONU 30a has changed from a standby state to the operating state O8. Such a churned-VP transmission triggered by a state transition from idle to O8 is called the "initial parameter delivery process." For use in this initial parameter delivery process, the flag controller 21 provides an "initial parameter delivered flag" for each individual ONU. More specifically, the flag controller 21 clears the flag to "0" when the ONU 30 is in the standby state, while it sets the flag to "1" when the initial parameter delivery process is finished. When the ONU 30 enters to state O8, the churning parameter transmission controller 22 checks the initial parameter delivered flag, and if the flag is still cleared at that time, it executes an initial parameter delivery process.

FIG. 16 is a flowchart showing the initial parameter delivery process using the initial parameter delivered flag. As a presupposition, note that every ONU has its own identifier n ; the state of individual ONUs and their respective flags (described later) are referred to by their identifiers n .

(S60) The flag controller 21 clears the initial parameter delivered flag(n) to "0" when each ONU(n) is in the standby state.

(S61) Suppose that a specific ONU(n) changes from the standby state to state O8.

(S62) Upon detection of the transition of the ONU(n) to state O8, the flag controller 21 checks whether its corresponding initial parameter delivered flag(n) is "0." If the flag is "0," then the process advances to step S63. If the flag is "1," the process terminates, since the flag indicates that the initial parameter delivery process has already been done.

(S63) The churning parameter transmission controller 22 executes an initial parameter delivery process for the ONU(n). More specifically, the churning parameter transmission controller 22 supplies the ONU(n) with churned-VP parameters for 4096 virtual paths. In response to each churned-VP message, the ONU(n) returns an acknowledge message to inform the sender of the correct reception. The initial parameter delivery process is finished when all 4096 churned-VP messages are transmitted and the subsequent acknowledge messages are received. When this is finished, the churning parameter transmission controller 22 sets the initial parameter delivered flag(n) to "1" accordingly.

As described above, the proposed OLT 20 has an

initial parameter delivered flag for each ONU, which is cleared when the ONU 30 is in the standby state and set when a relevant initial parameter delivery process is finished. With this flag, the OLT 20 executes an initial
5 parameter delivery process only when the ONU 30 makes a transition from standby to O8. This means that the proposed OLT 20 will never waste the bandwidth by executing again the same process, being triggered by other kinds of state transitions.

10 The flag controller 21 further provides an "initial parameter sending flag," which is controlled and used as follows. The flag controller 21 sets this flag during the execution of an initial parameter delivery process for an ONU. When the initial parameter sending
15 flag is set, the churning parameter transmission controller 22 stops accepting requests for an initial parameter delivery process. Suppose, for instance, that a plurality of ONUs left the standby state and have entered the operating state O8 simultaneously. In this case, the
20 churning parameter transmission controller 22 serves for the requesting ONU that made such a transition first. The initial parameter sending flag is set at this time, which makes other ONUs wait until the current process is finished.

25 FIG. 17 is a flowchart which shows the initial parameter delivery process using the initial parameter sending flag.

(S70) The flag controller 21 ensures that the initial parameter delivered flag(n) is "0."

(S71) The flag controller 21 tests whether the initial parameter sending flag is "0." If the flag is "0,"
5 the process advances to step S72. If the flag is "1," the process advances to step S74.

(S72) The flag controller 21 sets the initial parameter sending flag to "1" because no other ONUs are being served.

10 (S73) The churning parameter transmission controller 22 performs an initial parameter delivery process for the requesting ONU(n).

(S74) The churning parameter transmission controller 22 waits until the initial parameter sending flag
15 returns to "0" (i.e., until the ongoing initial parameter delivery process is finished).

In the way described above, the proposed OLT 20 performs the initial parameter delivery process for a specific ONU only when the initial parameter sending flag
20 is zero. This means that the next ONU cannot be served until the ongoing process is finished. Therefore, even if a plurality of ONUs simultaneously request the OLT to execute the process, the OLT can serially handle those requests, serving one ONU at a time. That is, the OLT can
25 sends initial churned-VP messages efficiently, without the need for complicated congestion control.

The flag controller 21 further provides a

hereafter as the "parameter updating process."

(S80) The flag controller 21 detects an update failure when the OLT 20 receives no acknowledge message from an ONU(n) within a period of 300 ms after sending the last churned-VP update message. Now it sets the relevant parameter update failure flag(n) to "1" accordingly.

(S81) The churning parameter transmission controller 22 stops sending messages to the failed ONU(n). The ONU(n) enters the standby state.

(S82) When the ONU(n), whose parameter update failure flag is set to "1," reenters to state 08, the churning parameter transmission controller 22 executes another initial parameter delivery process for this ONU(n).

In the way described above, the proposed OLT 20 is designed to re-execute an initial parameter delivery process, as well as setting a relevant parameter update failure flag, in the case that the ONU 30 has failed to update its churned-VP information. This additional execution of an initial parameter delivery process permits the failed ONU 30 to keep its stored churned-VP parameters consistent with those in the OLT 20.

The flag controller 21 further provides a "parameter update unfinished flag" for the following reason. Suppose again that a certain ONU 30 has finished its initial parameter delivery process and now it is in

the operating state. However, the ONU 30 could be forced out of the operating state because of some reason other than the above-discussed update failure. In such cases, the ongoing churned-VP update operation is deemed to be unfinished. To address this problem, the flag controller 21 provides a parameter update unfinished flag to indicate that the ONU 30 has not finished to update some churned-VP parameters. When the ONU 30 enters to state O8 again, the churning parameter transmission controller 22 checks the parameter update unfinished flag, and if the flag is still set at that time, it will execute an initial parameter delivery process.

FIG. 19 is a flowchart which shows an initial parameter delivery process using the parameter update unfinished flag. This process proceeds according to the following steps.

(S90) When a specific ONU(n) has left the operating state O8, the flag controller 21 sets its corresponding parameter update unfinished flag(n) to "1."

(S91) The churning parameter transmission controller 22 stops sending further messages to the failed ONU(n). The ONU(n) now enters to the standby state.

(S92) When the ONU(n), whose parameter update unfinished flag is set to "1," re-enters to state O8, the churning parameter transmission controller 22 executes another initial parameter delivery process

for this ONU(n).

In the way described above, the proposed OLT 20 is designed to re-execute an initial parameter delivery process, as well as setting a relevant parameter update
5 unfinished flag, in the case that the ONU 30 left the operating state. This additional execution of an initial parameter delivery process permits the ONU 30 to keep its stored churned-VP parameters consistent with those in the OLT 20, in the case of a problem other than churned-VP
10 update failures.

The flag controller 21 further provides a "churning key updating flag," which works as follows. As stated in an earlier section, the ONUs dynamically change their churning keys at prescribed intervals, thereby
15 ensuring data confidentiality. However, if a parameter updating process or parameter overwriting process is performed during the period of this churning key updating process, the churned-VP parameters could not be correctly updated because of possible conflict between the two
20 processes. To avoid this conflict, the flag controller 21 provides a churning key updating flag which is set during the period when a churning key updating process is under way.

When the churning key updating flag is set, the
25 optical line terminal 20 cannot send any messages other than churning key update messages. If a certain ONU 30 requests the OLT 20 to update churned-VP information

because of their time-critical nature. For this reason, the flag controller 21 provides a parameter updating flag which is set when a parameter updating process is being executed. Other requests from the ONU have to be suspended
5 when the parameter updating flag is set, thereby preventing unwanted interruptions, as well as giving a higher priority to the ongoing parameter updating process.

Referring now to FIGS. 20 to 23, the details of the parameter updating process will be explained below.

10 FIGS. 20 and 21 show a flowchart of a process executed at the beginning of each parameter updating process.

(S100) The churning parameter transmission controller 22 tests whether any parameter update request flag is set (note that the ONUs 30a to 30n have their own
15 flags). If the flag is "1," then the process advances to step S101. If the flag is "0," the process is terminated.

(S101) The churning parameter transmission controller 22 then tests a "send flag." This send flag is a flag
20 that the flag controller 21 provides to indicate that the OLT 20 is sending a churned-VP message. If the send flag is "1," the process repeats step S101 until the flag is cleared to "0." If the send flag is "0," the process advances to step S102.

25 (S102) The flag controller 21 sets again the send flag to "1," thereby inhibiting the acceptance of other requests.

Unlike the above steps, the following steps S103 and so on can be executed in parallel to serve a plurality of ONUs at a time. Suppose, for example, that three ONUs 30a, 30b, and 30c need to update their churned-VP
5 parameters. Then three processes will run concurrently to handle those requests. The following explanation focuses the parameter updating process for the ONU 30a.

(S103) The flag controller 21 clears the parameter update request flag to "0."

10 (S104) The flag controller 21 sets the parameter updating flag to "1."

(S105) The churning parameter transmission controller 22 composes a churned-VP message by inserting a relevant value to its VPI field. It also presets a counter k
15 (e.g., k=3) for repetitive transmission of this churned-VP message.

(S106) The churning parameter transmission controller 22 tests the churning key updating flag. If the flag is "1," the process repeats step S106 until the flag is
20 cleared to "0." If the send flag is "0," the process advances to step S107.

(S107) It is examined whether the ONU 30a is still in the operating state O8 or not. That is, if the parameter update unfinished flag is "1," the process branches
25 to step S110. If the flag is "0," the process advances to step S108.

(S108) The churning parameter transmission controller 22

sends out a churned-VP message. It then decrements the transmission counter k by one, so as to manage the number of churned-VP messages to be transmitted.

(S109) If the transmission counter k has reached zero,
5 the process is terminated. If not, the process returns to step S106.

(S110) The churning parameter transmission controller 22 executes an initial parameter delivery process.

FIG. 22 is a flowchart which shows a process of
10 receiving an acknowledge message. The ONU 30a sends back an acknowledge message in response to each churned-VP message that is correctly received from the OLT 20. The OLT 20 handles this acknowledge message according to the following steps.

15 (S120) The OLT 20 checks the message flow by measuring the time between the last churned-VP message and its subsequent acknowledge message. More specifically, the OLT 20 waits for an acknowledge message after sending the churned-VP message three times. If no
20 acknowledge is received within a prescribed period (300 ms) after sending the last churned-VP message, the OLT 20 detects a timeout error. If this is the case, the process branches to step S123. Otherwise, the process advances to step S121.

25 (S121) The churning key updating flag is tested. If the flag is "1," the process repeats step S121 until it is cleared to "0." If the flag is "0," the process

advances to step S122.

(S122) The flag controller 21 clears the parameter updating flag to "0."

(S123) The flag controller 21 sets the parameter update
5 failure flag to "1."

(S124) The churning parameter transmission controller 22 executes an initial parameter delivery process.

FIG. 23 is a flowchart which shows a process executed at the end of the parameter updating process.

10 This process comprises the following steps.

(S130) If all the parameter updating flags exhibit zeros, this indicates that the process is finished for all the ONUs concerned. If this is the case, the process advances to step S131. Otherwise, the process repeats
15 step S130 until all the non-zero flags are cleared.

(S131) The flag controller 21 clears the send flag to "0," thus enabling other requests.

The next section will describe the function of the churning parameter overwriting unit 23.

20 After a set of churning parameters are delivered to the ONU 30 through an initial parameter delivery process, the OLT 20 would not send churned-VP messages to the ONU 30 any more, as long as there is no change in the churned-VP parameters. Conventional ONUs and OLTs, however,
25 can neither detect nor correct inconsistency in their churned-VP parameters, once it was introduced for some reason. To address this problem, according to the present

invention, the OLT 20 employs a churning parameter
overwriting unit 23 which supplies the operating ONUs 30
with churned-VP parameters, being triggered by the
completion of initial parameter delivery processes. With
5 the supplied information, the ONUs 30 overwrite their
local churned-VP parameters, thus refreshing their
information bases during normal operation. Such processes
are termed "parameter overwriting processes," which would
permit the ONUs 30 and OLT 20 to correct inconsistency in
10 their churned-VP parameters, even if it happened to be
introduced for some reason.

The parameter overwriting process can be executed
as a lower-priority task, because it is a kind of safety
mechanism to maintain the consistency of churned-VP
15 parameters between the OLT 20 and ONUs 30. Accordingly,
the churning parameter transmission controller 22 may
suspend the transmission requests from the parameter
overwriting process, while giving higher priority to other
messaging activities including normal parameter updating
20 processes. The parameter overwriting process can run
without disturbing other messaging activities.

The churning parameter overwriting unit 23 has an
integral timer for use in the parameter overwriting
processes. Being activated after each churned-VP message
25 for overwriting purposes, this timer provides a minimum
interval of overwriting operations. To avoid conflict with
other messages, the churning parameter overwriting unit 23

does not produce the next churned-VP message until the timer is expired. The timer interval can be defined flexibly through a maintenance station.

The transmission of churned-VP messages should be properly controlled not to conflict with churning key update messages. This issue will be discussed as follows.

According to the ITU-T Recommendation G.983.1, various control messages to the ONUs 30 are conveyed by downstream PLOAM cells which are transmitted at regular intervals. It is therefore necessary for the OLT to determine which message to send to the ONUs 30 in the next PLOAM cell, by arbitrating between a plurality of message transmission requests, if any.

As previously explained in FIG. 3, churning key update messages are transmitted at intervals of $16 \cdot T_{\text{frame}}$. Transmission of churned-VP messages, on the other hand, should be completed three times during a period when the churning key updating flag is not set. To meet those constraints, the churning parameter transmission controller 22 would give priority to a churning key update message, if it conflicted with a churned-VP message. In this case, the OLT first sends the churning key update message three times, automatically at intervals of $16 \cdot T_{\text{frame}}$, and it then transmits the churned-VP message three times, automatically at intervals of $16 \cdot T_{\text{frame}}$. It should be noted that the arbitration takes place only at the first instance of those messages. Once the first

churning key update message is transmitted, the second and third instances can be sent without conflicting with each other.

Referring lastly to FIG. 24, the operation of the churning parameter updating unit 24 will be described below. While defining the activation timing of churning key updates, the ITU-T Recommendation G.983.1 lacks the definition of when to activate churned-VP updates. Without appropriate coordination, updating churned-VP parameters would introduce inconsistencies in churned-VP parameters between the OLT 20 and ONUs 30.

According to the present invention, the churning parameter updating unit 24 prevents any inconsistent updates by activating the new parameter at the churning key updating time point. FIG. 24 is a timing diagram which explains how the churned-VP parameters are updated. First, the OLT 20 sends a churned-VP message three times. Then the OLT 20 and the receiving ONU 30 activate this new churned-VP information at the first churning key updating time point after the last churned-VP message is sent. In this way, the churned-VP parameters are updated simultaneously at the both ends, without fear of producing inconsistencies.

The above discussion will now be summarized as follows. According to the present invention, the optical network unit comprises a first memory bank serving as active storage that stores currently used churning

parameters and a second memory bank serving as backup storage that stores newly updated churning parameters. The first and second memory banks exchange their roles at a predefined time point, and the churning parameters read
5 out of the active storage are used in the next frame to dechurn the information that is extracted from the incoming data stream. This structural arrangement improves the quality of communication control, because it ensures that the dechurning operations at the receiving end is
10 synchronized with the churning operations at the sending end in terms of the usage of updated churning parameters.

Further, according to the present invention, the optical line terminal provides various flags to control the transmission of data streams to the receiving network
15 units. Particularly, it provides control flags for use in the transmission of churning parameters. This feature of the invention improves the quality of communication control, ensuring that the dechurning operations in the receiving end is synchronized with the churning operations
20 in the sending end in terms of the usage of updated churning parameters.

The foregoing is considered as illustrative only of the principles of the present invention. Further, since numerous modifications and changes will readily occur to
25 those skilled in the art, it is not desired to limit the invention to the exact construction and applications shown and described, and accordingly, all suitable modifications

WHAT IS CLAIMED IS:

1. An optical network unit coupled to an optical access network system, which receives a data stream and dechurns information contained in the received data stream by using a churning key, comprising:

(a) churning parameter memory means for storing churning parameters that indicate which logical connections are churned or not churned, comprising:

10 (a1) first memory means, initially assigned an active role, for storing the churning parameters that are currently used, and

(a2) second memory means, initially assigned a backup role, for storing newly updated churning parameters,

15 wherein said first memory means and second memory means are controlled so that the active and backup roles will alternate with each other at every churning key updating time point at which an updated churning key becomes effective; and

20 (b) data dechurning means for receiving a data stream consisting of a plurality of frames and dechurning churned information contained in the data stream according to the churning parameters stored in said first or second memory means currently playing the active role, the churning parameters being activated at the beginning of a frame subsequent to the churning key updating time point.

2. The optical network unit according to claim 1, wherein:

5 said first memory means is assigned the backup role, and said second memory means is assigned the active role as a result of said alternating of the active and backup roles at the churning key updating time point; and

10 said churning parameter memory means performs a copying process to copy the stored churning parameters from said second memory means to said first memory means.

3. The optical network unit according to claim 2, wherein said churning parameter memory means saves a new churning parameter into said first memory means after the copying process is finished, when the new churning parameter is received during the copying process.

4. The optical network unit according to claim 1, wherein said churning parameter memory means comprises said first and second memory means each having two ports for reading out data therefrom.

5. The optical network unit according to claim 1, wherein said churning parameter memory means, after receiving each newly updated churning parameter, verifies whether the received churning parameter has correctly been written to said first or second memory

means, and returns an acknowledge message only when the received churning parameter is successfully verified.

6. The optical network unit according to
5 claim 1, further comprising:

a non-volatile memory; and

external memory control means for storing the churning parameters into said non-volatile memory.

10 7. The optical network unit according to claim 6, wherein said external memory control means compares each received churning parameter with the corresponding churning parameter read out of said second memory means currently playing the backup role, so as to
15 write only changed churning parameters to said non-volatile memory.

8. The optical network unit according to claim 6, wherein:

20 said external memory control means comprises a local memory to store the churning parameters temporarily; and

upon power-down, said external memory control means transfers at a time the churning parameters from
25 said local memory to said non-volatile memory.

9. The optical network unit according to

claim 6, wherein:

said external memory control means comprises a local memory to store the churning parameters temporarily; and

5 upon power-down, said external memory control means transfers only changed churning parameters from said local memory to said non-volatile memory.

10 10. The optical network unit according to claim 6, wherein said churning parameter memory means receives the churning parameters from said non-volatile memory only when the optical network unit is in a standby state after power-up.

15 11. The optical network unit according to claim 6, wherein said churning parameter memory means activates either of the churning parameters received from said non-volatile memory and a set of newly supplied churning parameters after power-up.

20 12. The optical network unit according to claim 1, further comprising dechurning mask means for disabling the dechurning function of said data dechurning means during a period from a restarting time point to the
25 churning key updating time point, said restarting time point being a time point when the optical network unit re-enters an operating state from another state after having

left the operating state.

13. An optical network unit coupled to an optical access network system, which receives a data stream and dechurns information contained in the received data stream by using a churning key, comprising:

churning parameter memory means for storing churning parameters that indicate which logical connections are churned or not churned; and

10 data dechurning means for receiving the data stream consisting of a plurality of frames and dechurning the information contained in the data stream according to the churning parameters stored in said churning parameter memory means, the churning parameters being activated at
15 the beginning of each frame, whereby an update having been made thereto in a specific frame becomes effective in the next frame.

14. An optical line terminal coupled to an optical access network system, which transmits a data stream containing information that is churned by using a churning key, comprising:

flag control means for controlling flags when sending the data stream to a receiving end; and

25 churning parameter transmission control means for controlling transmission of churning parameters to the receiving end, based on the status of the flags, the

churning parameters indicating which logical connections are churned or not churned.

15. The optical line terminal according to
5 claim 14, wherein said flag control means clears an initial parameter delivered flag when the receiving end is in a standby state, and sets the initial parameter delivered flag at the end of an initial parameter delivery process that delivers an entire set of the current
10 churning parameters to the receiving end.

16. The optical line terminal according to
claim 14, wherein the flags provided by said flag
controlling means include an initial parameter delivery in
15 progress flag that indicates that an initial parameter delivery process is in progress to deliver an entire set of the current churning parameters to the receiving end.

17. The optical line terminal according to
20 claim 14, wherein said flag control means sets a parameter update failure flag when an update of the churning parameters being stored in the receiving end has failed.

18. The optical line terminal according to
25 claim 14, wherein said flag control means sets a parameter update unfinished flag when the receiving end has left an operating state.

19. The optical line terminal according to claim 14, wherein said flag control means sets a churning key updating flag when the optical line terminal is
5 updating the churning key.

20. The optical line terminal according to claim 14, wherein said flag control means sets a parameter update request flag when initiating an update of the
10 churning parameters.

21. The optical line terminal according to claim 20, wherein said flag control means sets the parameter update request flag to initiate an update of one
15 logical connection for one receiving end.

22. The optical line terminal according to claim 14, wherein said flag control means sets a parameter updating flag when the churning parameters are being
20 updated.

23. The optical line terminal according to claim 14, further comprising churning parameter overwriting means for performing a churning parameter
25 overwriting process that resends the churning parameters to the receiving end.

24. The optical line terminal according to claim 23, wherein said churning parameter overwriting means suspends the churning parameter overwriting process when transmitting another message having a higher priority.

5

25. The optical line terminal according to claim 23, wherein said churning parameter overwriting means suspends the overwriting process while the churning parameters are being updated.

10

26. The optical line terminal according to claim 23, wherein:

said churning parameter overwriting means comprises a timer that operates at predetermined intervals; and

15

said churning parameter overwriting means is regularly activated by said timer.

27. The optical line terminal according to claim 26, wherein the interval of said timer is given by an external source.

20

28. The optical line terminal according to claim 14, wherein:

said churning parameter transmission control means transmits a churning parameter message multiple times to send one of the churning parameters to the receiving end;

25

when sending the first instance of the churning parameter message, said churning parameter transmission control means performs arbitration between the churning parameter message and other messages; and

5 after the arbitration is finished, said churning parameter transmission control means automatically transmits the multiple instances of the churning parameter message at predetermined intervals.

10 29. The optical line terminal according to claim 14, further comprising churning parameter updating means for updating the churning parameters at a churning key updating time point where the churning key is updated.

ABSTRACT OF THE DISCLOSURE

An optical network unit and an optical line terminal which efficiently control the data receiving and
5 dechurning processes in a passive optical network. In a churning parameter memory subsystem, a first memory bank stores churning parameters that are currently used, while a second memory bank stores updates made to the churning parameters. Under the control of the churning parameter
10 memory subsystem, those first and second memory banks change their roles with each other at a churning key updating time point. A data dechurning unit receives a data stream consisting of a plurality of frames and dechurns the information contained in the data stream,
15 according to the stored churning parameters. When an update is done to the parameters in a certain frame, the data dechurning unit makes the update effective at the next frame, thus starting data dechurning operations from the next frame.

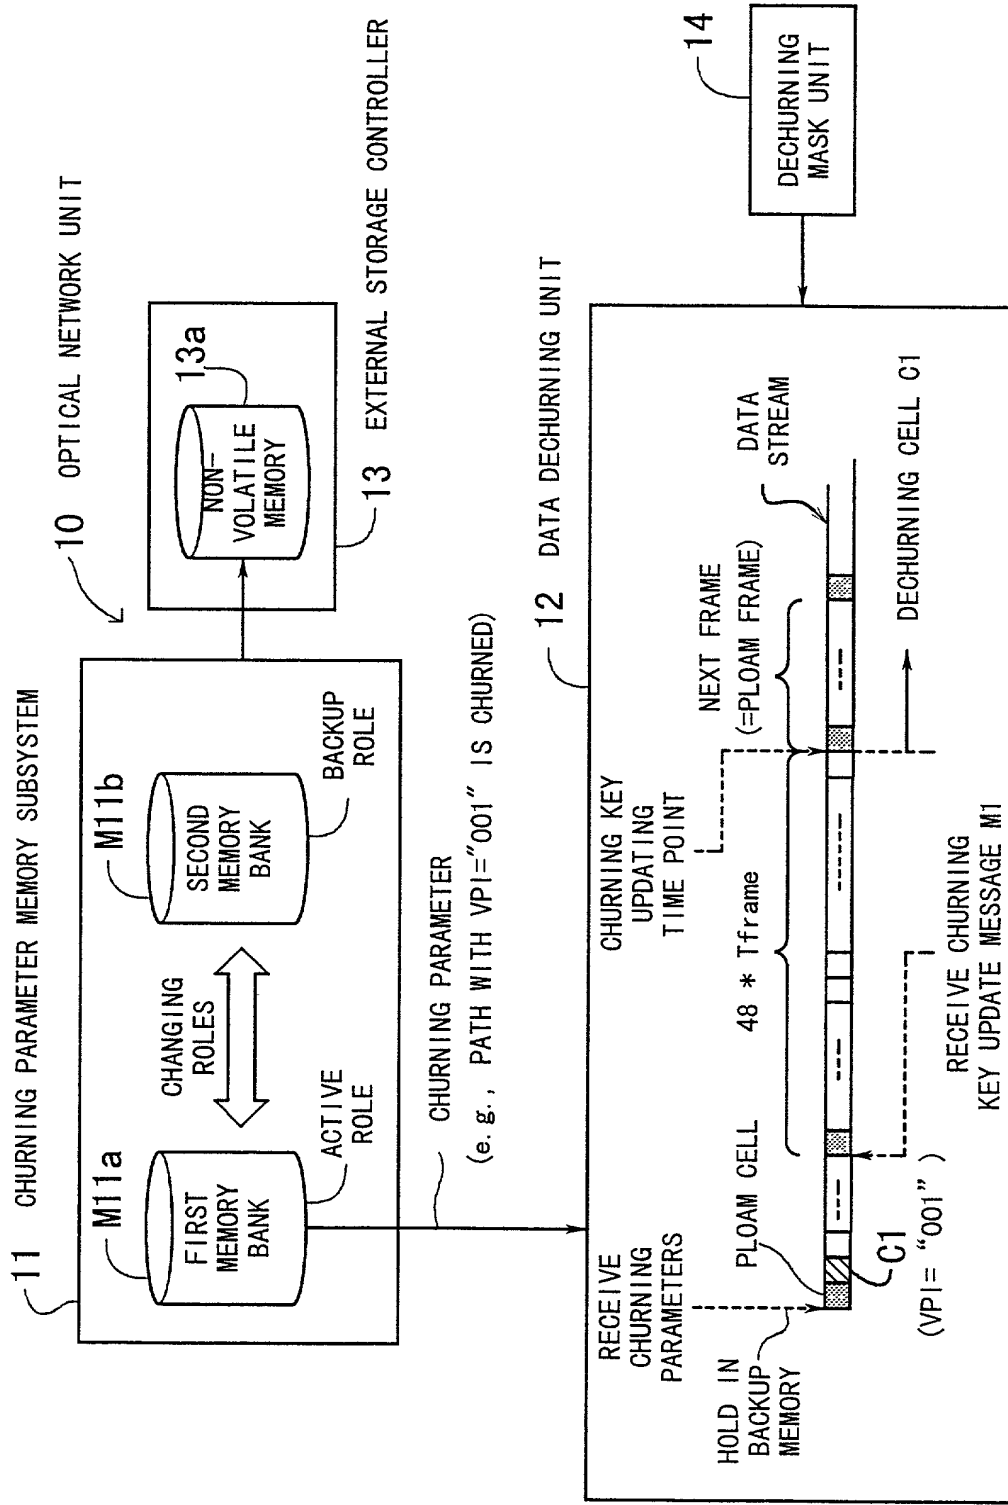


FIG. 1

The flowchart illustrates a data backup process:

- START** (Oval)
- S10: SWITCH BETWEEN TWO RAM BANKS** (Rectangle)
- S11: READ DATA** (Rectangle)
- S12: WRITE DATA** (Rectangle)
- S13: FINISHED ALL ENTRIES?** (Diamond)
 - If **NO**, the flow returns to S11.
 - If **YES**, the flow proceeds to **END** (Oval).

Below the flowchart, four RAM states are shown, each containing a table of hexadecimal values:

- Top Left (Initial State):**
 - 11a RAM:** "000" = 1, "001" = 0, "010" = 0, ..., "FFD" = 1, "FFE" = 0, "FFF" = 1. Labeled **ACTIVE**.
 - 11b RAM:** "000" = 1, "001" = 1, "010" = 0, ..., "FFD" = 1, "FFE" = 1, "FFF" = 1. Labeled **BACKUP**.
- Top Right (After S10):**
 - 11a RAM:** Same as top left. Labeled **BACKUP**.
 - 11b RAM:** Same as top left. Labeled **ACTIVE**.
- Bottom Left (After S11, S12):**
 - 11a RAM:** "000" = 1, "001" = 1, "010" = 0, ..., "FFD" = 1, "FFE" = 1, "FFF" = 1. Labeled **BACKUP**.
 - 11b RAM:** Same as top right. Labeled **ACTIVE**.
- Bottom Right (After S13):**
 - 11a RAM:** Same as bottom left. Labeled **BACKUP**.
 - 11b RAM:** Same as bottom left. Labeled **ACTIVE**.

A **COPY** arrow points from the 11b RAM in the top right to the 11b RAM in the bottom right.

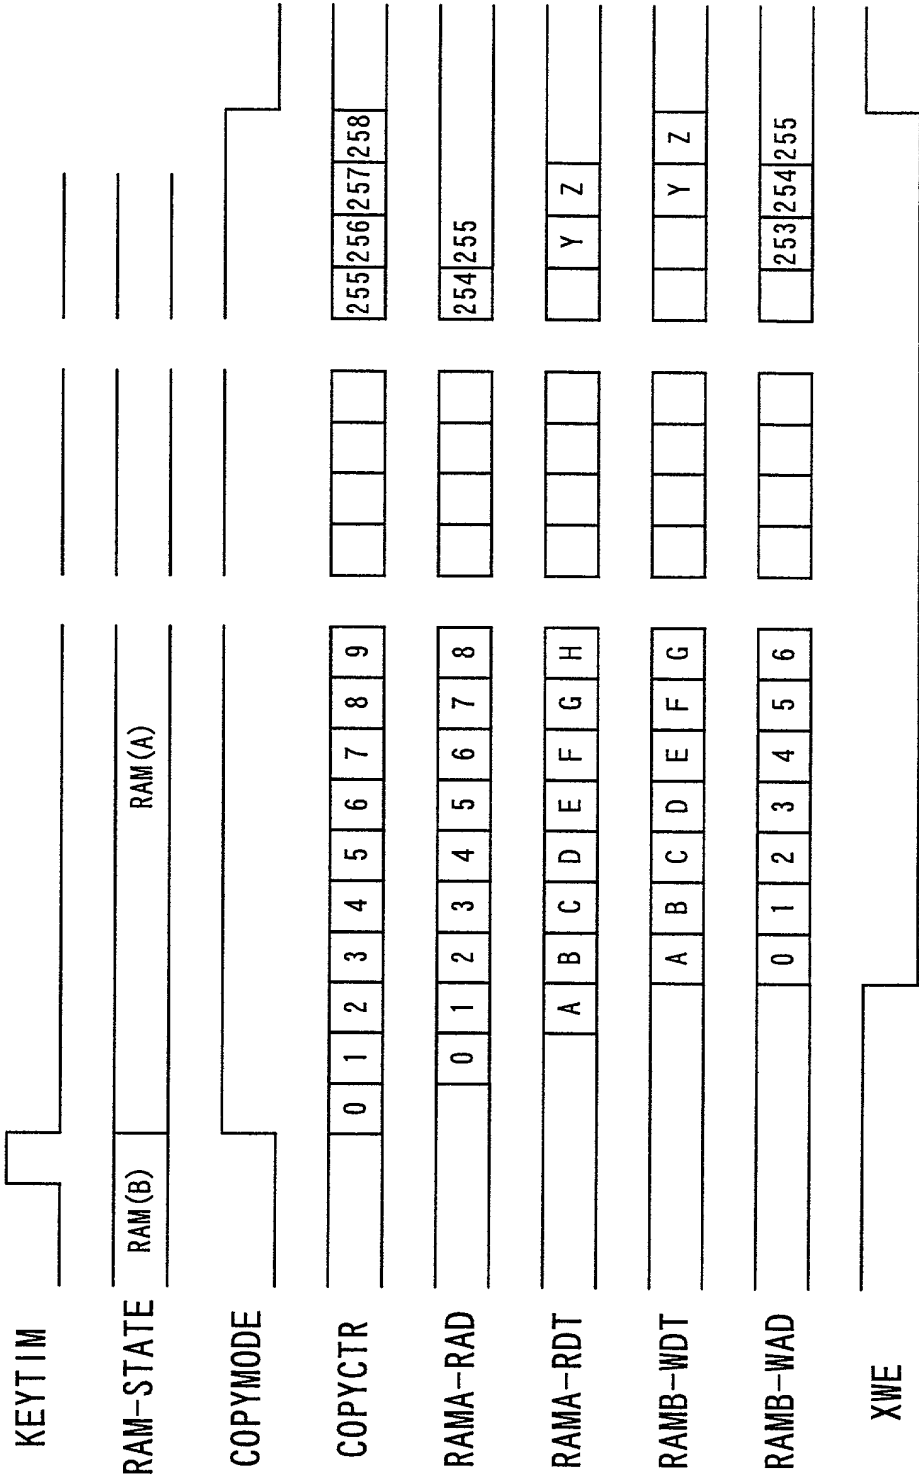


FIG. 6


```

graph TD
    START([START]) --> S20[RECEIVE CHURNED-VP  
PARAMETER]
    S20 --> S21[READ OUT DATA]
    S21 -- "SEND ADDRESS" --> RAM[RAM (B)]
    S21 --> S22{CHECK DATA PARITY}
    RAM -- "RECEIVE DATA  
(ACT BITS)" --> S22
    S22 -- "ERROR" --> S29[SEND ERROR REPORT]
    S22 -- "NO ERROR" --> S23{COMPARE DATA}
    S23 -- "SAME" --> S25[READ OUT DATA]
    S23 -- "DIFFERENT" --> S24[UPDATE DATA]
    S24 -- "SEND ADDRESS,  
DATA,  
WRITE ENABLE" --> RAM
    S24 --> S25
    RAM -- "RECEIVE DATA  
(ACT BITS)" --> S25
    S25 --> S26{CHECK DATA PARITY}
    S26 -- "ERROR" --> S29
    S26 -- "NO ERROR" --> S27{COMPARE DATA}
    S27 -- "DIFFERENT" --> S29
    S27 -- "SAME" --> S28[RETURN ACKNOWLEDGE  
MESSAGE]
    S29 --> END([END])
    S28 --> END

```

END

START

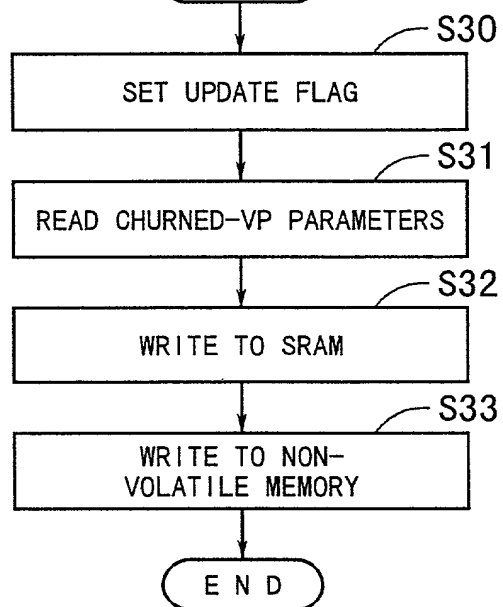


FIG. 9

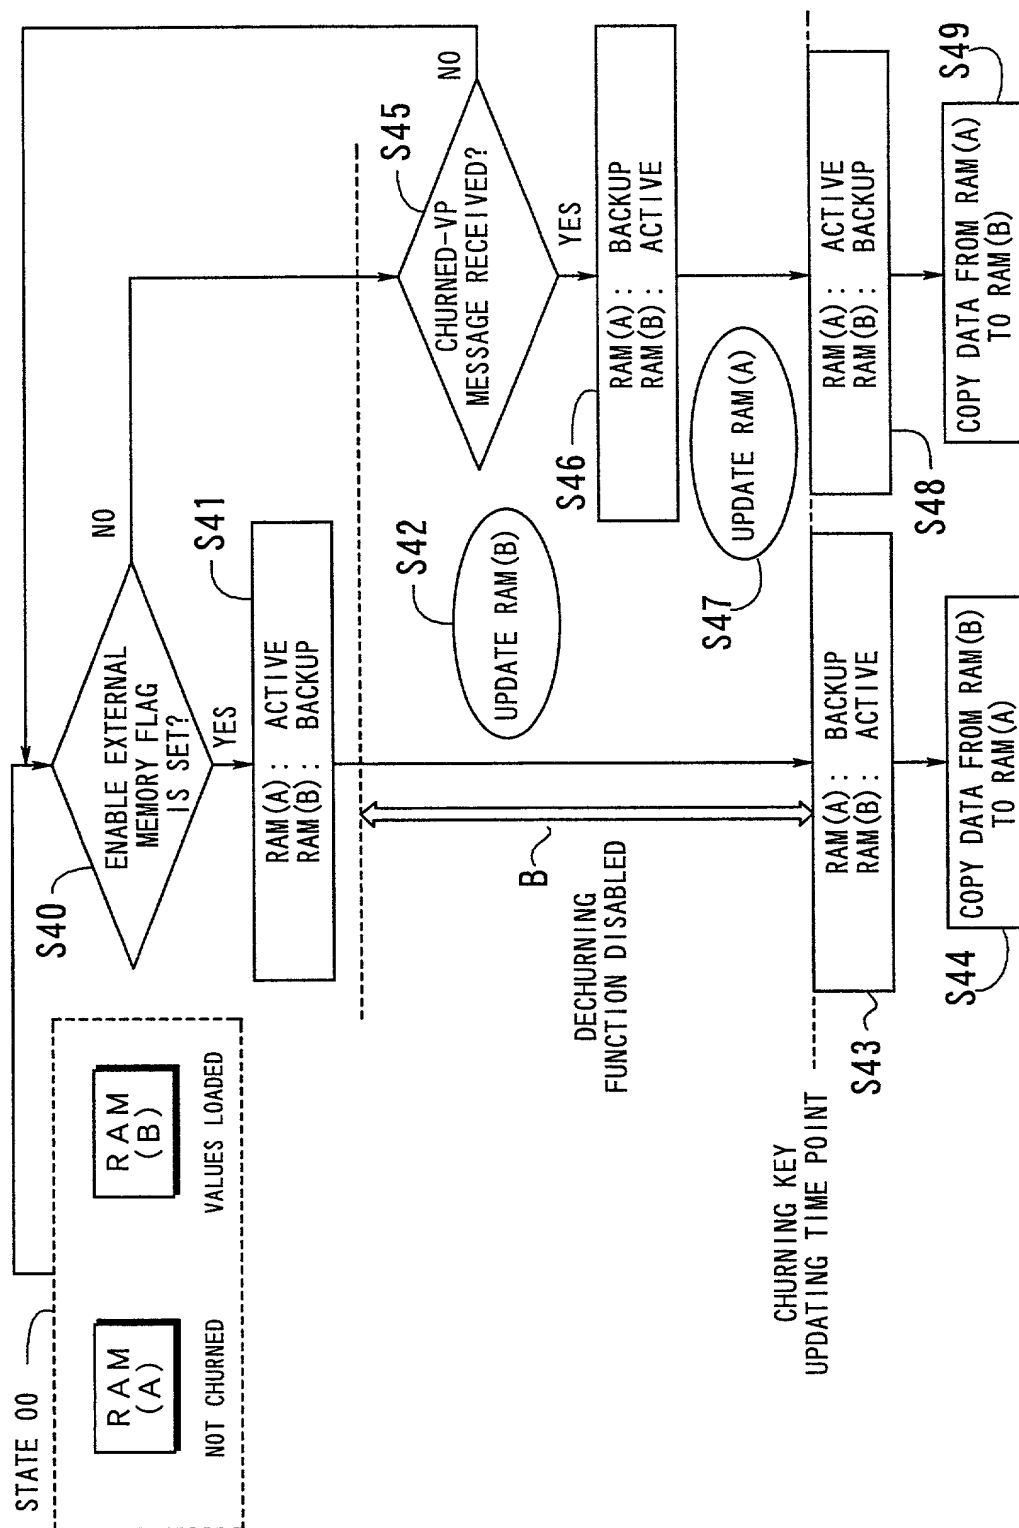


FIG. 10

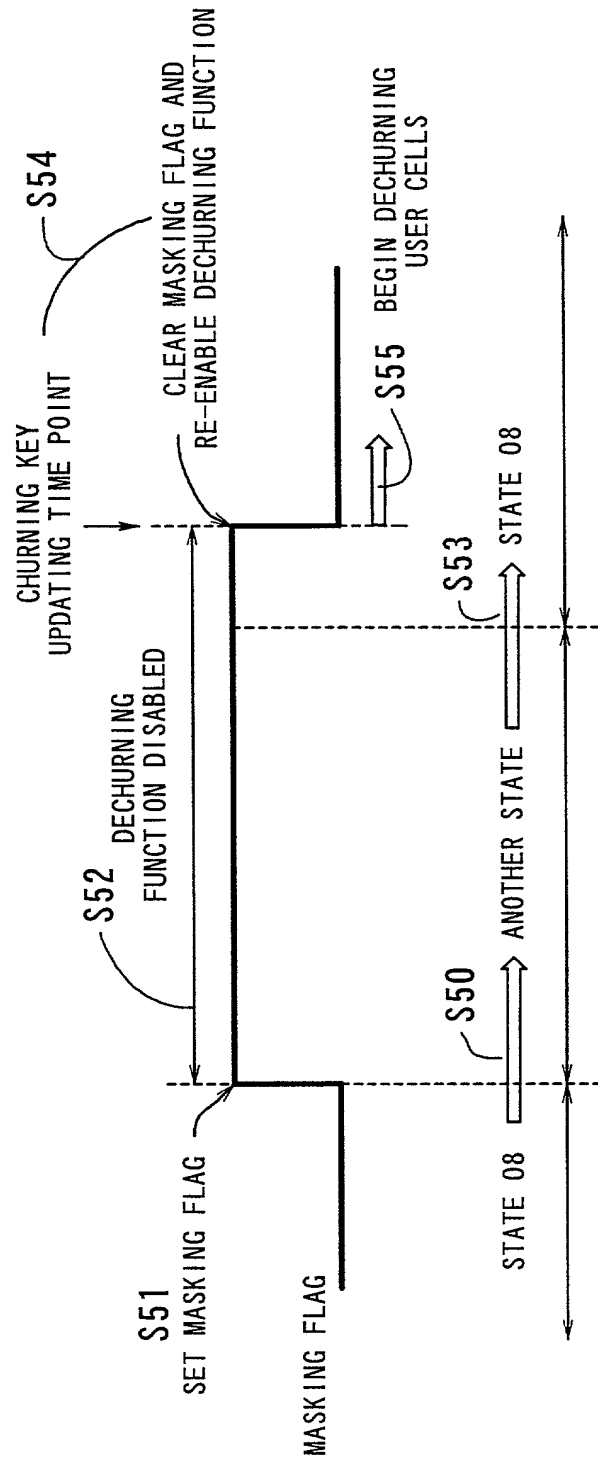


FIG. 11

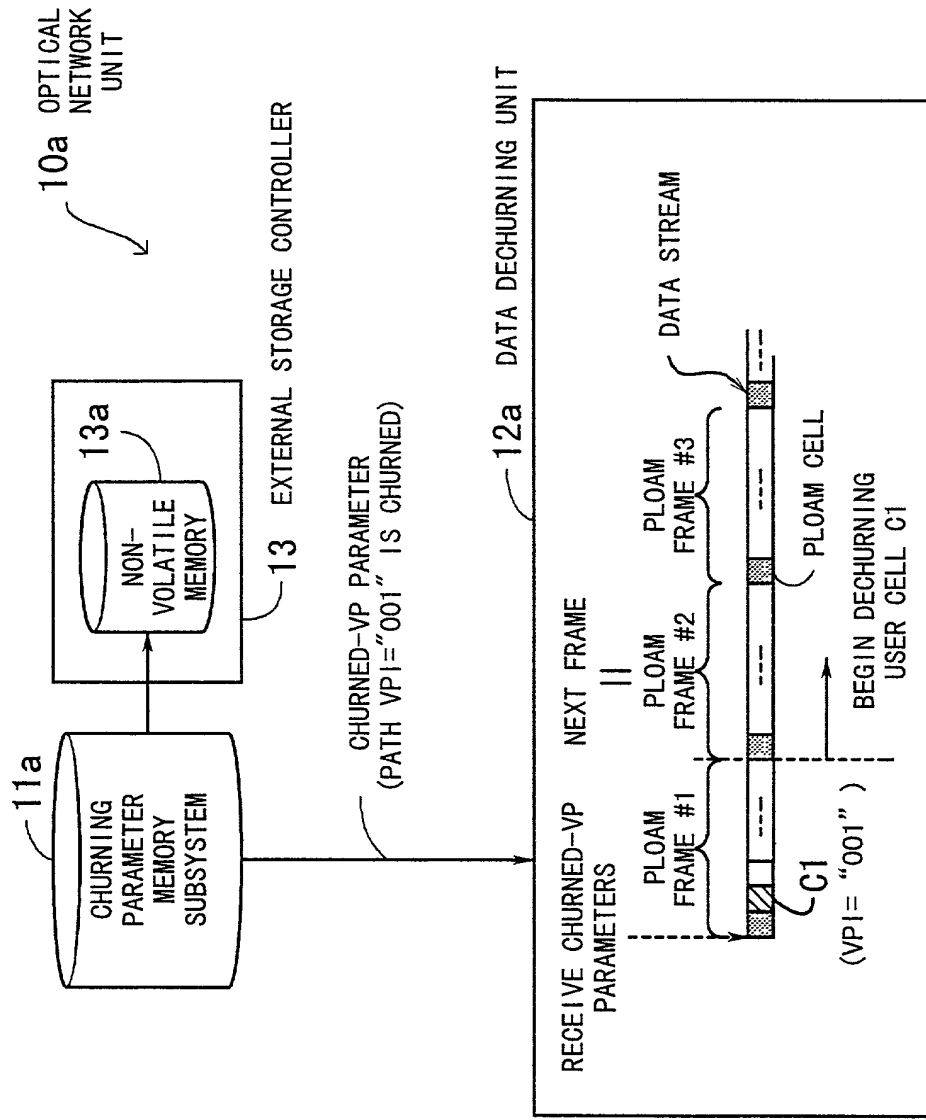


FIG. 12

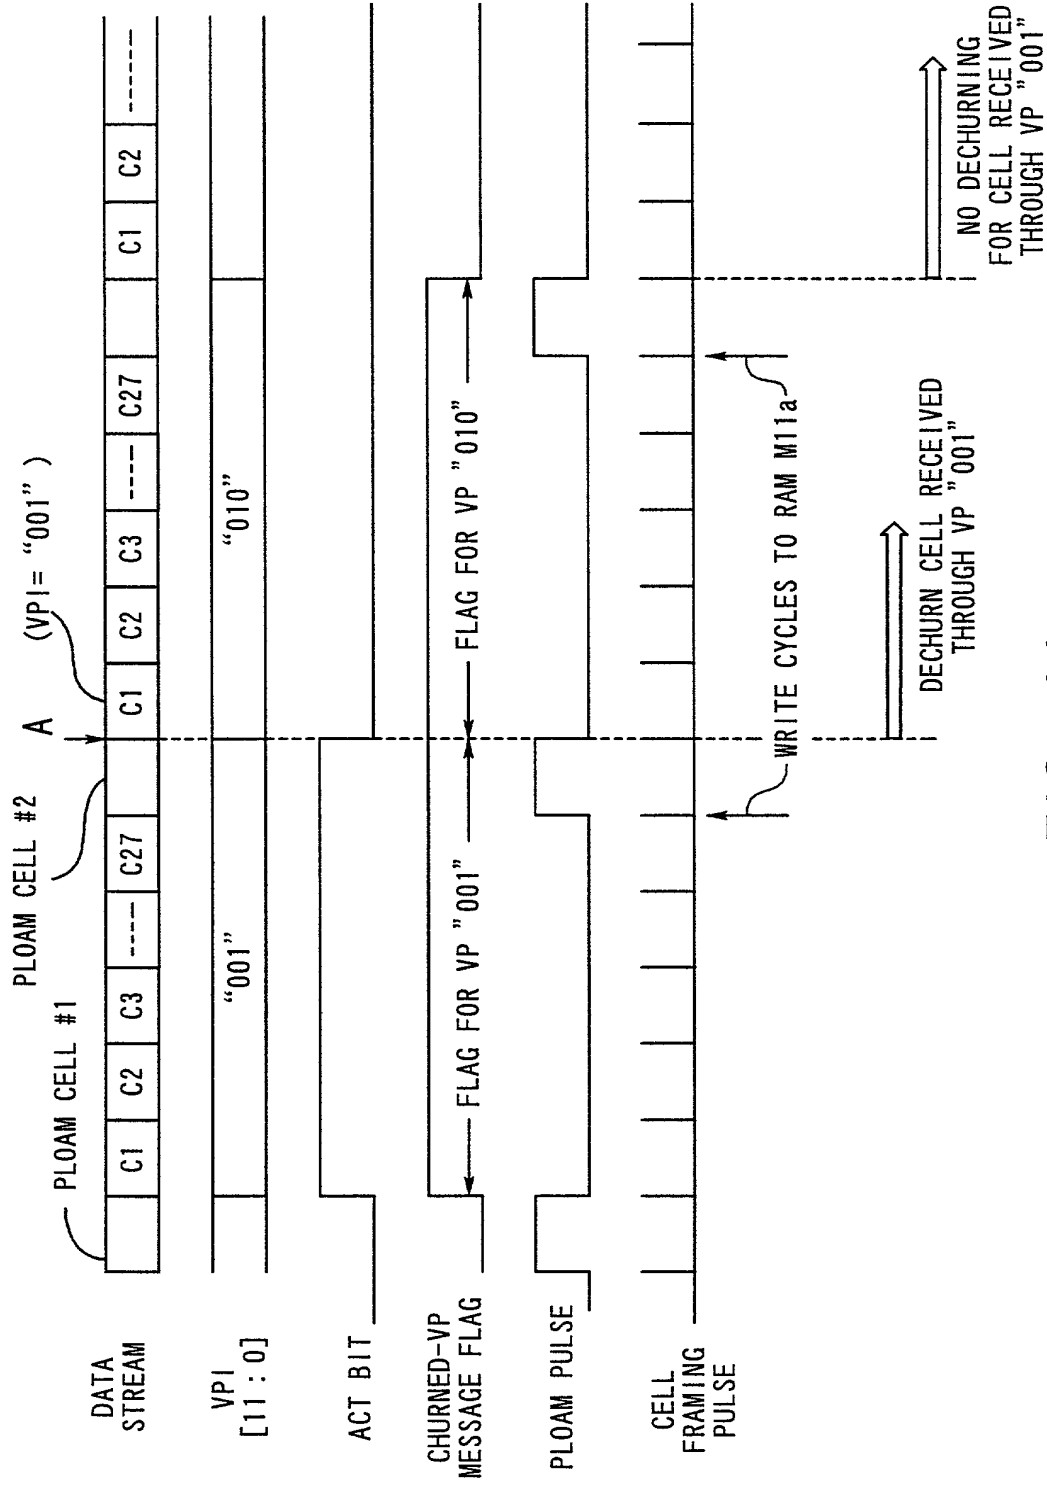


FIG. 14


```
graph TD; START([START]) --> S60[INITIAL PARAMETER DELIVERED FLAG (n)=0]; S60 --> S61[ONU (n) ENTERS 08 STATE]; S61 --> S62{INITIAL PARAMETER DELIVERED FLAG (n)=0?}; S62 -- YES --> S63[EXECUTE INITIAL PARAMETER DELIVERY PROCESS]; S62 -- NO --> S63; S63 --> END([END]);
```

Flowchart illustrating the initial parameter delivery process (FIG. 10):

- START
- S60: INITIAL PARAMETER DELIVERED FLAG (n)=0
- S61: ONU (n) ENTERS 08 STATE
- S62: INITIAL PARAMETER DELIVERED FLAG (n)=0?
- If YES: S63: EXECUTE INITIAL PARAMETER DELIVERY PROCESS
- If NO: S63: EXECUTE INITIAL PARAMETER DELIVERY PROCESS
- END

FIG. 16

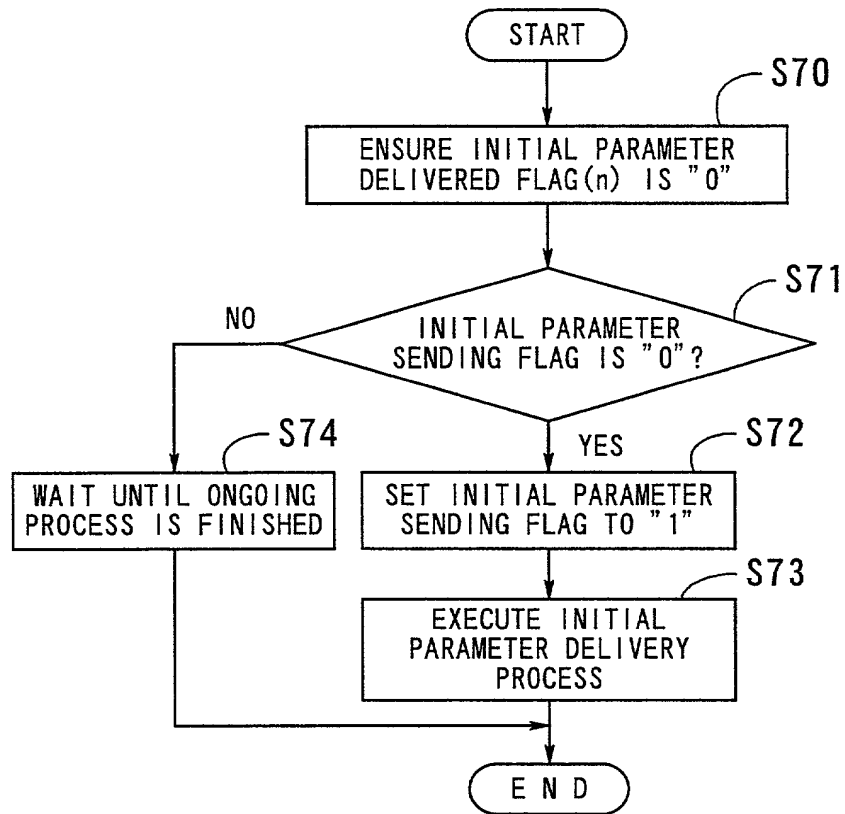


FIG. 17

START

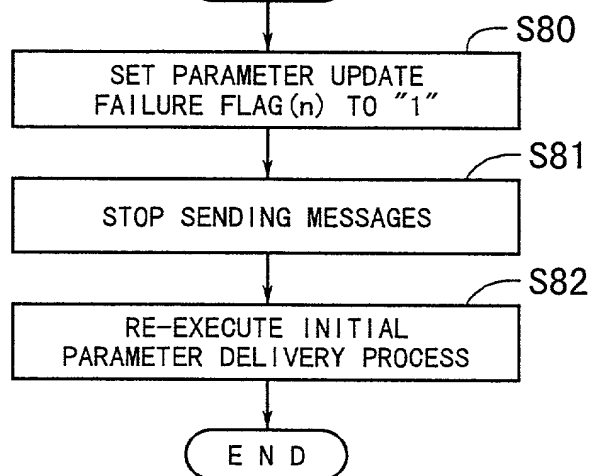


FIG. 18

1	100	100	100
2	100	100	100
3	100	100	100
4	100	100	100
5	100	100	100
6	100	100	100
7	100	100	100
8	100	100	100
9	100	100	100
10	100	100	100
11	100	100	100
12	100	100	100
13	100	100	100
14	100	100	100
15	100	100	100
16	100	100	100
17	100	100	100
18	100	100	100
19	100	100	100
20	100	100	100
21	100	100	100
22	100	100	100
23	100	100	100
24	100	100	100
25	100	100	100
26	100	100	100
27	100	100	100
28	100	100	100
29	100	100	100
30	100	100	100
31	100	100	100
32	100	100	100
33	100	100	100
34	100	100	100
35	100	100	100
36	100	100	100
37	100	100	100
38	100	100	100
39	100	100	100
40	100	100	100
41	100	100	100
42	100	100	100
43	100	100	100
44	100	100	100
45	100	100	100
46	100	100	100
47	100	100	100
48	100	100	100
49	100	100	100
50	100	100	100
51	100	100	100
52	100	100	100
53	100	100	100
54	100	100	100
55	100	100	100
56	100	100	100
57	100	100	100
58	100	100	100
59	100	100	100
60	100	100	100
61	100	100	100
62	100	100	100
63	100	100	100
64	100	100	100
65	100	100	100
66	100	100	100
67	100	100	100
68	100	100	100
69	100	100	100
70	100	100	100
71	100	100	100
72	100	100	100
73	100	100	100
74	100	100	100
75	100	100	100
76	100	100	100
77	100	100	100
78	100	100	100
79	100	100	100
80	100	100	100
81	100	100	100
82	100	100	100
83	100	100	100
84	100	100	100
85	100	100	100
86	100	100	100
87	100	100	100
88	100	100	100
89	100	100	100
90	100	100	100
91	100	100	100
92	100	100	100
93	100	100	100
94	100	100	100
95	100	100	100
96	100	100	100
97	100	100	100
98	100	100	100
99	100	100	100
100	100	100	100

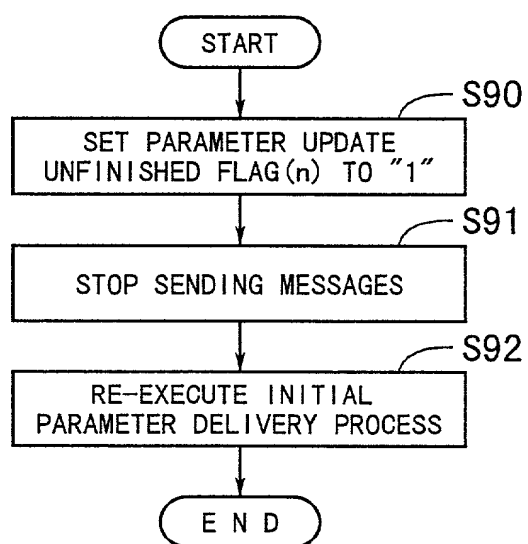


FIG. 19

```

graph TD
    START([START]) --> S100{ANY PARAMETER  
UPDATE REQUEST  
FLAG IS "1"?}
    S100 -- NO --> END([END])
    S100 -- YES --> S101{SEND FLAG IS "1"?}
    S101 -- YES --> S101
    S101 -- NO --> S102[SET SEND FLAG TO "1"]
    S102 --> S103[CLEAR PARAMETER  
UPDATE REQUEST  
FLAG TO "0"]
    S103 --> S104[SET PARAMETER  
UPDATING FLAG TO "1"]
    S104 --> S105[SET VPI VALUE  
AND LOAD TRANSMISSION  
COUNTER k]
    S105 --> 1((1))

```

FIG. 20

```

graph TD
    Start((1)) --> S106{CHURNING KEY  
UPDATING FLAG IS "1"?}
    S106 -- YES --> S106
    S106 -- NO --> S107{PARAMETER  
UPDATE UNFINISHED  
FLAG IS "1"?}
    S107 -- YES --> S110[EXECUTE INITIAL  
PARAMETER DELIVERY  
PROCESS]
    S107 -- NO --> S108[k = k - 1]
    S108 --> S109{k = 0?}
    S109 -- YES --> End([END])
    S109 -- NO --> S106
    S110 --> S109

```

FIG. 21

```

graph TD
    START([START]) --> S120{TIMEOUT?}
    S120 -- YES --> S123[SET PARAMETER UPDATE FAILURE FLAG TO "1"]
    S120 -- NO --> S121{CHURNING KEY UPDATING FLAG IS "1"?}
    S121 -- YES --> S122[CLEAR PARAMETER UPDATING FLAG TO "0"]
    S121 -- NO --> S123
    S123 --> S124[EXECUTE INITIAL PARAMETER DELIVERY PROCESS]
    S124 --> END([END])
    S122 --> END

```

FIG. 22

```

graph TD
    START([START]) --> S130{ALL PARAMETER  
UPDATING FLAGS ARE  
"0"?}
    S130 -- NO --> S130
    S130 -- YES --> S131[CLEAR SEND FLAG TO "0"]
    S131 --> END([END])

```

2

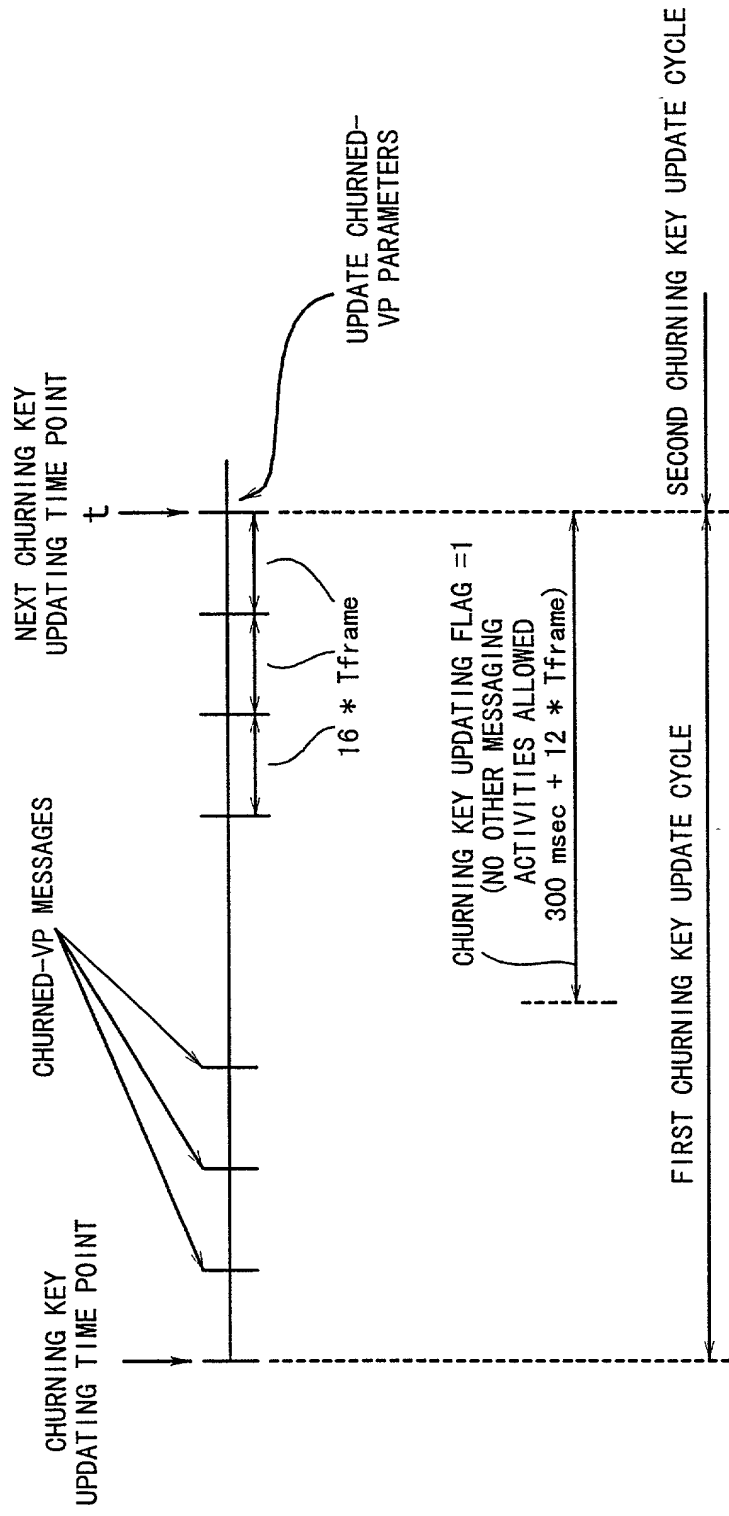


FIG. 24

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

OPTICAL NETWORK UNIT AND OPTICALLINE TERMINAL

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
11-109687

(Number)
(番号)

Japan
(Country)
(国名)

16/04/1999
(Day/Month/Year Filed)
(出願年月日)

Priority Not Claimed
優先権主張なし

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。（弁護上、または代理人の氏名及び登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625
Send Correspondence to:
HELFGOTT & KARAS, P.C.
Empire State Building, 60th Floor
New York, New York 10118
United States of America

直接電話連絡先：（名前及び電話番号）

Direct Telephone Calls to: (name and telephone number)

Helfgott & Karas, P.C.
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor	
	Takashi MONZAWA	
発明者の署名	日付	Inventor's signature Date
		<i>Takashi Monzawa</i> Jan. 5, 2000
住所	Residence	
	Chuo-ku, Osaka, Japan	
国籍	Citizenship	
	Japanese	
私書箱	Post Office Address	
	c/o FUJITSU KANSAI DIGITAL TECHNOLOGY LIMITED, 2-6, Shiromi 2-chome, Chuo-ku, Osaka 540-0001 JAPAN	
第二共同発明者	Full name of second joint inventor, if any	
	Kenji MIURA	
第二共同発明者	日付	Second inventor's signature Date
		<i>Kenji Miura</i> Jan. 5, 2000
住所	Residence	
	Chuo-ku, Osaka, Japan	
国籍	Citizenship	
	Japanese	
私書箱	Post Office Address	
	c/o FUJITSU KANSAI DIGITAL TECHNOLOGY LIMITED, 2-6, Shiromi 2-chome, Chuo-ku, Osaka 540-0001 JAPAN	

（第三以降の共同発明者についても同様に記載し、署名をすること）

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Tamotsu MATSUO		
第三共同発明者	日付	Third inventor's signature <i>Tamotsu Matsu</i>	Date Jan. 5, 2000
住 所	Residence Chuo-ku, Osaka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KANSAI DIGITAL TECHNOLOGY LIMITED, 2-6, Shiromi 2-chome, Chuo-ku, Osaka 540-0001 JAPAN		
第四共同発明者	Full name of fourth joint inventor, if any Hideki SHIONO		
第四共同発明者	日付	Fourth inventor's signature <i>Hideki Shiono</i>	Date Jan. 5, 2000
住 所	Residence Chuo-ku, Osaka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KANSAI DIGITAL TECHNOLOGY LIMITED, 2-6, Shiromi 2-chome, Chuo-ku, Osaka 540-0001 JAPAN		

第五共同発明者	Full name of fifth joint inventor, if any Yoshimi TOYODA		
第五共同発明者	日付	Fifth inventor's signature <i>Yoshimi Toyoda</i>	Date Jan. 5, 2000
住 所	Residence Chuo-ku, Osaka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KANSAI DIGITAL TECHNOLOGY LIMITED, 2-6, Shiromi 2-chome, Chuo-ku, Osaka 540-0001 JAPAN		
第六共同発明者	Full name of sixth joint inventor, if any Toshinori KOYANAGI		
第六共同発明者	日付	Sixth inventor's signature <i>Toshinori Koyanagi</i>	Date Jan. 5, 2000
住 所	Residence Kawasaki-shi, Kanagawa, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 JAPAN		

(第七以降の共同発明者についても同様に
記載し、署名をすること)

(Supply similar information and signature for
seventh and subsequent joint inventors.)

第七共同発明者	Full name of seventh joint inventor, if any Setsuo ABIRU		
第七共同発明者	日付	Seventh inventor's signature <i>Setsuo Abiru</i>	Date Jan.5, 2000
住 所	Residence Kawasaki-shi, Kanagawa, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 JAPAN		
第八共同発明者	Full name of eighth joint inventor, if any Jun ASATO		
第八共同発明者	日付	Eighth inventor's signature <i>Jun Asato</i>	Date Jan.5, 2000
住 所	Residence Chuo-ku, Osaka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KANSAI DIGITAL TECHNOLOGY LIMITED, 2-6, Shiromi 2-chome, Chuo-ku, Osaka 540-0001 JAPAN		
第九共同発明者	Full name of ninth joint inventor, if any Shinichi FUJIYOSHI		
第九共同発明者	日付	Ninth inventor's signature <i>Shinichi Fujiyoshi</i>	Date Jan.5, 2000
住 所	Residence Fukuoka-shi, Fukuoka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KYUSHU DIGITAL TECHNOLOGY LIMITED, 22-8, Hakataekimae 3-chome, Hakata-ku, Fukuoka-shi, Fukuoka 812-0011 JAPAN		
第十共同発明者	Full name of tenth joint inventor, if any Kazuhiro UCHIDA		
第十共同発明者	日付	Tenth inventor's signature <i>Kazuhiro Uchida</i>	Date Jan.5, 2000
住 所	Residence Fukuoka-shi, Fukuoka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KYUSHU DIGITAL TECHNOLOGY LIMITED, 22-8, Hakataekimae 3-chome, Hakata-ku, Fukuoka-shi, Fukuoka 812-0011 JAPAN		

(第十一以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for eleventh and subsequent joint inventors.)

第十一共同発明者	Full name of eleventh joint inventor, if any Kazuya RYU		
第十一共同発明者	日付	Eleventh inventor's signature <i>Kazuya Ryu</i>	Date Jan. 5, 2000
住 所	Residence Fukuoka-shi, Fukuoka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KYUSHU DIGITAL TECHNOLOGY LIMITED, 22-8, Hakataekimae 3-chome, Hakata-ku, Fukuoka-shi, Fukuoka 812-0011 JAPAN		
第十二共同発明者	Full name of twelfth joint inventor, if any Katsuhiko HIRASHIMA		
第十二共同発明者	日付	Twelfth inventor's signature <i>Katsuhiko Hirashima</i>	Date Jan. 5, 2000
住 所	Residence Fukuoka-shi, Fukuoka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KYUSHU DIGITAL TECHNOLOGY LIMITED, 22-8, Hakataekimae 3-chome, Hakata-ku, Fukuoka-shi, Fukuoka 812-0011 JAPAN		

第十三共同発明者	Full name of thirteenth joint inventor, if any Tateo SHIMARU		
第十三共同発明者	日付	Thirteenth inventor's signature <i>Tateo Shimaru</i>	Date Jan. 5, 2000
住 所	Residence Fukuoka-shi, Fukuoka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KYUSHU DIGITAL TECHNOLOGY LIMITED, 22-8, Hakataekimae 3-chome, Hakata-ku, Fukuoka-shi, Fukuoka 812-0011 JAPAN		
第十四共同発明者	Full name of fourteenth joint inventor, if any Mitsuharu WAKAYOSHI		
第十四共同発明者	日付	Fourteenth inventor's signature <i>Mitsuharu Wakayoshi</i>	Date Jan. 5, 2000
住 所	Residence Fukuoka-shi, Fukuoka, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU KYUSHU DIGITAL TECHNOLOGY LIMITED, 22-8, Hakataekimae 3-chome, Hakata-ku, Fukuoka-shi, Fukuoka 812-0011 JAPAN		

(第七以降の共同発明者についても同様に
記載し、署名をすること)

(Supply similar information and signature for
seventh and subsequent joint inventors.)

第15共同発明者	Full name of fifteenth joint inventor, if any Toshiyuki SAKAI		
第15共同発明者	日付	Fifteenth inventor's signature <i>Toshiyuki Sakai</i>	Date Jan.5, 2000
住 所	Residence Kawasaki-shi, Kanagawa, Japan.		
国 籍	Citizenship Japanese		
私 書 箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 JAPAN		
第16共同発明者	Full name of sixteenth joint inventor, if any		
第16共同発明者	日付	Sixteenth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私 書 箱	Post Office Address		

第17共同発明者	Full name of seventeenth joint inventor, if any		
第17共同発明者	日付	Seventeenth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私 書 箱	Post Office Address		
第18共同発明者	Full name of eighteenth joint inventor, if any		
第18共同発明者	日付	Eighteenth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私 書 箱	Post Office Address		

(第十一以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for eleventh and subsequent joint inventors.)

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: **Takashi MONZAWA et al.**

Filed: : **Concurrently herewith**

For : **OPTICAL NETWORK UNIT AND OPTICAL LINE TERMINAL**

Serial No.: **Concurrently herewith**

February 29, 2000


Assistant Commissioner of Patents
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Samson Helfgott, Reg. No. 23,072 attorney of record
herein, do hereby grant a sub-power of attorney to Linda S.
Chan, Reg. No. 42,400, Jacqueline M. Steady, Reg. No., 44,354
and Harris A. Wolin, Reg. No. 39,432 to act and sign in my behalf
in the above-referenced application.

Respectfully submitted,



Samson Helfgott
Reg.No 23,072

HELFGOTT & KARAS, P.C.
60th FLOOR
EMPIRE STATE BUILDING
NEW YORK, NY 10118
DOCKET NO.: FUJR17.002
LHH:power

Filed Via Express Mail
Rec. No.: EL522353927US
On: February 29, 2000
By: Lydia Gonzalez
Any fee due as a result of this paper, not covered
by an enclosed check may be charged on Deposit
Acct. No. 08-1634.

0054500-02900